

SEL Digital Secondary System Solutions




Advance how you protect and control your substation primary equipment

- Increase safety by removing high-energy copper cables from areas where personnel work.
- Reduce costs by decreasing materials and the labor required for wiring installation, commissioning, and documentation.
- Minimize misoperations due to wiring errors by reducing the number of physical routing paths and connections.
- Achieve simplicity and eliminate complex Ethernet network design by implementing SEL Time-Domain Link (TiDL[®]) technology.
- Maximize flexibility and interoperability with an IEC 61850-9-2 or IEC 61869-9 Sampled Values (SV) process bus solution.



Solutions Overview

SEL digital secondary system solutions advance how you protect and control the primary equipment in your substation by using digital devices in the secondary system to transport data via fiber rather than copper. These solutions reduce substation construction and expansion costs, increase reliability, improve personnel safety, and increase flexibility.

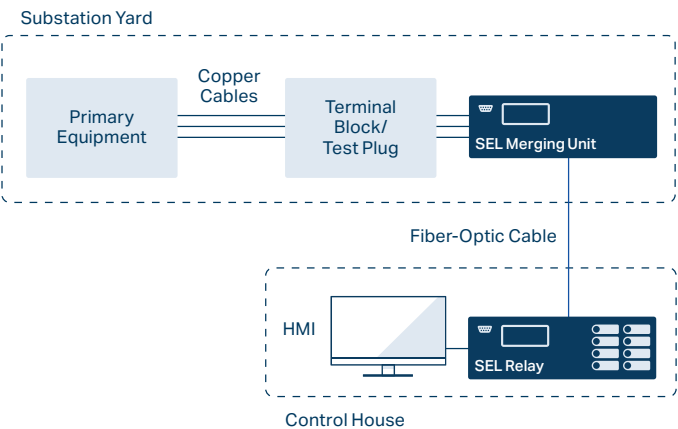

Key Benefits

Increase Safety

Moving high-energy copper cables away from the control house decreases the potential for electrical safety hazards, such as open CT connections.

Reduce Costs

Eliminating a significant quantity of copper cables in a substation yard and replacing it with fiber helps save money. Along with reducing the associated material and space expenses, it also reduces the labor required for cable routing, installation, commissioning, and documentation.

Simplify Installation

Having fewer copper cables reduces the number of physical routing paths and connections needed, thereby reducing wiring errors and missed connections. Fewer wiring errors reduces time spent rewiring and lowers the chance of inadvertently causing a misoperation.

Pick the SEL Solution That Fits Your Needs

Choose one of the SEL digital secondary system solutions when modernizing your substation:

- TiDL Technology—A point-to-point solution that eliminates complex Ethernet network design and the need for external time synchronization.
- SV Technology—A network-based solution that combines protection in the merging unit with the flexibility of IEC 61850-9-2 or IEC 61869-9.

TiDL and SV are based on the proven protection of the SEL-400 series relays, providing consistency for relay settings, algorithms, schemes, and configurations in the control house. Settings management is simplified using SEL Grid Configurator, a new software tool that features a spreadsheet-style editor, powerful protection visualization, comprehensive reporting, custom filters, and multiple-device settings management.

	TiDL	SV
Merging Units Located in Substation Yard	SEL-TMU	SEL-401, SEL-421, SEL-451, and SEL-487E
Devices Placed in Control House	SEL-421, SEL-451, SEL-487B, SEL-487E, and SEL-411L	SEL-421, SEL-451, SEL-487B, SEL-487E, and SEL-411L Ethernet switch (e.g., SEL-2740S) Satellite-synchronized clock (e.g., SEL-2488)
Transport Protocols	SEL T-Protocol	IEC 61850-9-2 or IEC 61869-9 GOOSE
Communications Configuration	Point-to-point	Networked
Sampling Rate	10 kHz	4.8 kHz



SEL TiDL Technology

TiDL technology is a point-to-point solution engineered with simplicity in mind. This technology requires no external time source, has a strong cybersecurity posture, and is easy to implement, with no network engineering required.

Simple Architecture


SEL-TMU TiDL Merging Units are placed in the yard close to the primary equipment and digitize discrete I/O signals and analog data, such as voltages and currents. These data are then transported over fiber-optic cables to a TiDL relay in the control house. With this point-to-point architecture, implementation is simple and requires zero network engineering.

Data-Sharing Capabilities

Each SEL-TMU can be paired with up to four SEL-400 series TiDL relays. This new data-sharing capability gives you flexibility on how to best design protection for your system and makes installations more economical by reducing the device count. In addition, the point-to-point connections make expansion easy.

Built-In Time Synchronization

TiDL maintains relative time; therefore, it does not rely on an external time reference for protection. All data from the SEL-TMU devices are synchronized with each other regardless of the number of devices connected to the relay or the length of the fiber.

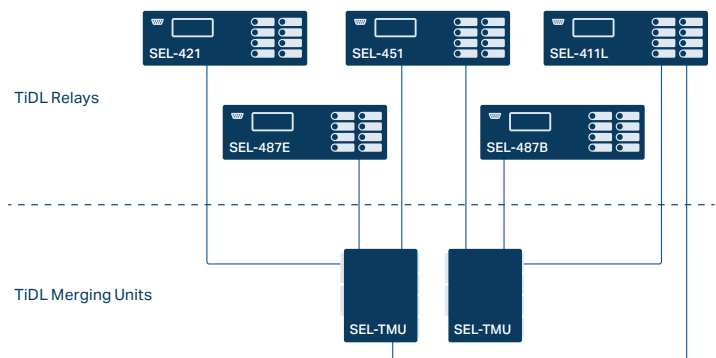

Strong Cybersecurity Posture

The dedicated, deterministic TiDL system helps secure mission-critical applications. The isolated point-to-point connections and the absence of switches and routers reduce the electronic security perimeter and limit attack points. This security-minded architecture prevents remote access, and its simplicity eliminates the need for managing port access.

Custom Topologies and Aliases

Use Grid Configurator to configure and commission custom TiDL topologies to fit each application. The software maps the merging unit's I/O to the local I/O of the relay and verifies all connections and hardware, making commissioning quick and easy. While programming your topologies, you can give customized names to the merging unit's I/O quantities (e.g., the physical location of the unit or company nomenclature) to make the mapping configuration more intuitive.

SV Technology

SEL SV combines protection in the merging unit with the flexibility of IEC 61850-9-2 or IEC 61869-9. The merging unit digitizes analog signals from primary equipment and then transmits them to an SV relay in the control house via an Ethernet network.

Merging Units With Built-In Protection

In an SEL SV solution, all SEL SV merging units offer local protection for a variety of applications, depending on the model. If network communications are lost, the SEL merging units provide backup standalone protection.

Interoperability


SEL SV devices are implemented with IEC 61850-9-2 and the UCA 61850-9-2LE guideline or IEC 61869-9. You can use them with primary equipment that generates SV streams or with other manufacturers' SV-compliant units.

Advanced Network and Monitoring Diagnostic Tools

SEL SV products provide advanced network monitoring and diagnostic tools through standard IEC 61850 logical nodes. Additional diagnostic information and statistics are available through COM SV, GOO, ETH, and COM PRP commands, which aid in troubleshooting. The TEST SV command allows you to check the network connectivity as well as the CT and PT ratios between publisher and subscriber devices.

Flexible Ethernet Network

SV technology allows you to create a flexible Ethernet-based point-to-multipoint network using tools such as software-defined networks or VLANs to fit your application needs. You can use the SEL-2741 Ethernet Switch to provide centralized traffic engineering and improve Ethernet performance. The switch acts as a transparent Precision Time Protocol clock that supports the IEEE C37.238 power system profile, ensuring submicrosecond time synchronization of the end devices.

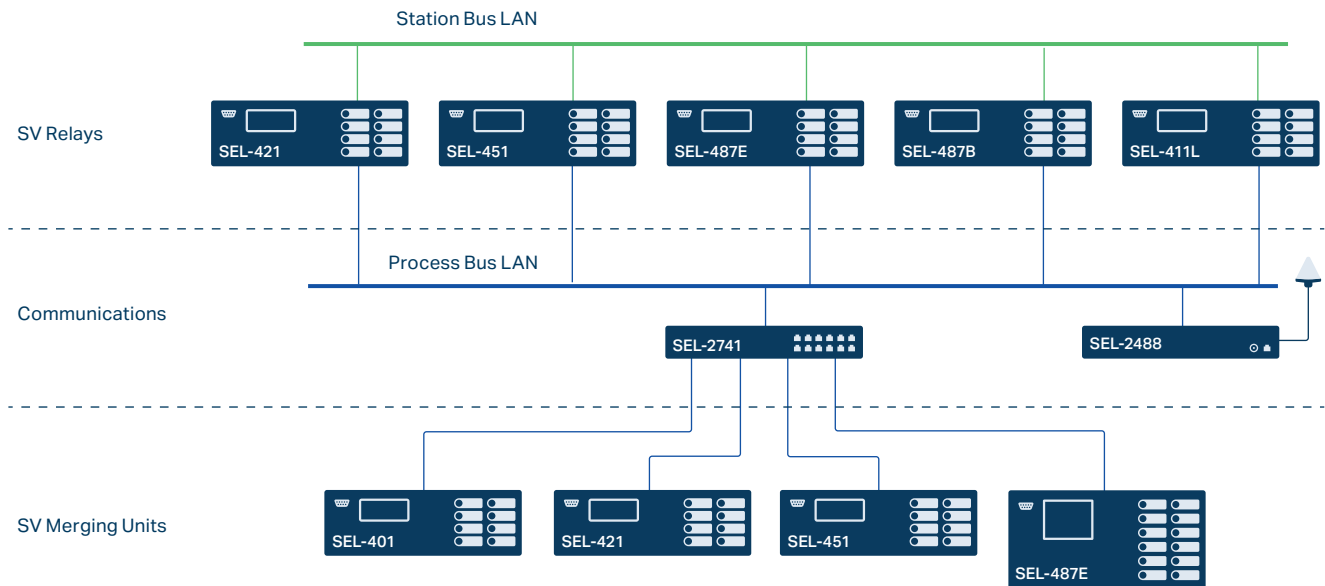

Making Electric Power Safer, More Reliable, and More Economical
+1.509.332.1890 | info@selinc.com | selinc.com

© 2025 by Schweitzer Engineering Laboratories, Inc.
PF00549 • 20250911

