



SEL-2245-42 AC Protection Module

The SEL-2245-42 provides ac analog inputs for the SEL Axion[®]. Install as many as nine SEL-2245-42 modules within an Axion node and as many as sixteen SEL-2245-42 modules per system in any combination.

Front Panel



Figure 1 SEL-2245-42 AC Protection Module

Mechanical Installation

Each SEL-2242 chassis/backplane has four or ten slots, labeled A-J. Slots B-J support the SEL-2245-42 modules.

To install an SEL-2245-42 module, tip the top of the module away from the chassis, align the notch on the bottom of the module with the slot you want on the chassis, and place the module on the bottom lip of the chassis, as *Figure 2* illustrates. The module is aligned properly when it rests entirely on the lip of the chassis.



Figure 2 Proper Module Placement

Next, carefully rotate the module into the chassis, making sure that the alignment tab fits into the corresponding slot at the top of the chassis (refer to *Figure 3*). Finally, press the module firmly into the chassis and tighten the chassis retaining screw.



Figure 3 Final Module Alignment

Input Connections

The SEL-2245-42 CT/PT analog inputs include a dot next to the terminal number to indicate the positive connection. Refer to *Specifications* for ac analog input ratings and to *Figure 4* for terminal assignments. You can configure potential transformer (PT) inputs for 6–300 V and current transformer (CT) inputs for 0–20 A. Configure inputs by adding a Fieldbus I/O connection for each module in ACSELERATOR RTAC[®] SEL-5033 Software. See the EtherCAT[®] portion in *Section 2: Communications* in the SEL-5033 Software Instruction Manual for details.

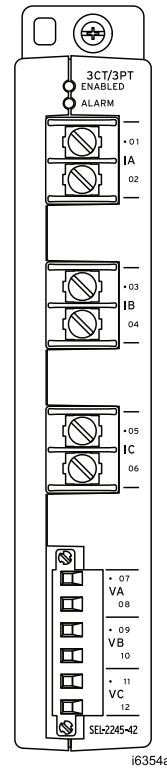


Figure 4 CT/PT Analog Inputs

LED Indicators

The LEDs labeled **ENABLED** and **ALARM** are related to EtherCAT network operation. The green **ENABLED** LED illuminates when the module is operating normally on the network. The **ALARM** LED illuminates during network initialization or when there is a problem with the network.

Specifications

Compliance

Designed and manufactured under an ISO 9001 certified quality management system

UL Listed to U.S. and Canadian safety standards (File E220228; NRAQ, NRAQ7)

CE Mark

Product Standards

IEC 60255-26:2013 - Relays and Protection Equipment: EMC
 IEC 60255-27:2014 - Relays and Protection Equipment: Safety
 IEC 60825-2:2004 +A1:2007 +A2:2010 for fiber-optic communications
 IEC 61850-3:2013 - Comm Systems for Power Utility Automation

General

Operating and Storage Temperature Range

−40° to +85°C (−40° to +185°F)

Units should be stored and transported in their original packaging.

Note: Operating temperature evaluated for UL ambient 0° to 40°C.

Operating Environment

Pollution Degree:	2
Overvoltage Category:	III
Insulation Class:	1
Relative Humidity:	5–95%, noncondensing
Maximum Altitude:	2000 m
Vibration, Earth Tremors:	Class 1

AC Analog Input Channels

Frequency	
Rated:	50/60 Hz
Range:	40–90 Hz
Typical Accuracy:	±0.005 Hz above 20 V
Worst Case Accuracy:	±0.01 Hz above 20 V
Phase Rotation:	ABC, ACB
Input Configuration:	3-Wire Delta, 4-Wire Wye

Update Intervals

Fundamental Metering:	250 Hz
RMS:	250 Hz, 1 cycle window

AC Current Channels

Nominal Current:	1 A _{RMS} or 5 A _{RMS} (no setting required)
Current Range Rating (With DC offset at X/R = 10, 1.5 cycles):	0.1–91 A
Operational Range:	0.1–300 A _{RMS}
Measurement Range:	0.1–20 A _{RMS}
Thermal Withstand Limit:	15 A _{RMS} continuous 500 A _{RMS} for one second
Fundamental Measurement Accuracy	
Magnitude:	±0.1%, typical, ±0.001 A ±2%, worst case, ±0.001 A
Phase:	±0.1°, typical at f _{NOM} and current > 0.4 A ±1°, over full rated temperature range ±2°, worst case
RMS Measurement Accuracy	
Magnitude:	±0.1%, typical, ±0.001A ±2%, worst case, ±0.001A
Burden:	<0.1 VA @ 67 V Impedance >500 kΩ

AC Voltage Channels

Rated Range:	67–240 V _{L-N}
Note: Rated Range refers to the IEEE C37.118 rating system.	
Operational Range:	0–300 V _{L-N}
Accuracy Range:	6.7–300 V _{L-N}
Rated Insulation Voltage:	300 V _{L-N} continuous 600 V _{L-N} for ten seconds
Galvanic Isolated Channels	
Channel-to-Ground and Channel-to-Channel:	2.5 kV _{RMS} for one minute
Fundamental Measurement Accuracy	
Magnitude:	±0.1%, typical, plus ±0.05 V ±3%, worst case, plus ±0.05 V
Phase:	±0.1° @ f _{NOM} , typical ±1° @ f _{NOM} , over full rated temperature range ±2° @ f _{NOM} , worst case
RMS Measurement Accuracy	
Magnitude:	±0.1%, typical, plus ±0.05 V ±3%, worst case, plus ±0.05 V
Burden:	<0.01 VA @ 67 V Impedance > 500 kΩ

Sequence Components

Values:	I0, I1, I2, V0, V1, V2
Note: Sequence components are of the fundamental frequency.	
Accuracy	
Magnitude:	±1%, typical
Angle:	±0.5°, typical

Power and Power Factor (Per-Phase and Three-Phase)

Values:	PA, PB, PC, PAB, PBC, PCA QA, QB, QC, QAB, QAC, QCA SA, SB, SC, SAB, SBC, SCA PFA, PFB, PFC, P3, Q3, S3, PF3
Accuracy:	±1%, typical

THD and Noise (Accuracy)

±5% of measurement plus ±0.25%

Synchrophasors

Conformance:	IEEE C37.118.1-2011 as amended by IEEE C37.118.1a-2014 IEEE C37.118.2-2011
Accuracy:	Level 1 as specified by IEEE C37.118
Measurements:	Software selectable (P or M class)
Voltage:	VA, VB, VC
Current:	IA, IB, IC
Positive-Sequence:	V1, I1
Periodic:	Frequency and df/dt
Processing Rate:	120 Hz

Triggered Waveform Recording

Sampling Rates:	1, 2, 4, 8, 24 kHz software selectable
Transient Fault Record Length	
Individual Records as Long as:	24 seconds for 24 kHz 72 seconds for 8 kHz 144 seconds for 4 kHz 288 seconds for 2 kHz 576 seconds for 1 kHz
Prefault Time:	0.05 s to (max. event length – 0.05 s)
Data Format:	IEEE C37.111-2013 COMTRADE
File Naming:	IEEE C37.232 COMNAME

Fuse Rating

Non-Serviceable:	2.5 A, 125 V, time lag T
------------------	--------------------------

Type Tests

Environmental Tests

Enclosure Protection:	IEC 60255-27:2013 (Type 1 enclosure required for full compliance to IEC 60255-27) IEC 60529:1989 + A1:1999 + A2:2013 IP4X, excluding the terminal blocks
Vibration Resistance:	IEC 60255-21-1:1988 Vibration Endurance, Severity: Class 2 Vibration Response, Severity: Class 2
Shock Resistance:	IEC 60255-21-2:1988 Bump Withstand, Severity: Class 1 Shock Withstand, Severity: Class 1 Shock Response, Severity: Class 2
Seismic:	IEC 60255-21-3:1993 Quake Response, Severity: Class 2
Cold, Operational and Cold, Storage:	IEC 60068-2-1:2007 –40°C, 16 hours
Dry Heat, Operational and Dry Heat, Storage:	IEC 60068-2-2:2007 +85°C, 16 hours
Damp Heat, Cyclic:	IEC 60068-2-30:2005 25° to 55°C, 6 cycles, 95% relative humidity
Damp Heat, Steady State:	IEC 60068-2-78:2012 93% RH and 55°C for 10 days
Change of Temperature:	IEC 60068-2-14:2009 1 deg. per minute, –40° and +85°C, 5 cycles

Power Supply Immunity

Voltage Dips and Interruptions:	IEC 60255-26:2013 IEC 61000-4-11:2004 IEC 61000-4-29:2000
Ripple:	IEC 60255-26:2013 IEC 61000-4-17:1999 + A1:2001 + A2:2008
Gradual Shutdown and Startup:	IEC 60255-26:2013
Discharge of Capacitors:	IEC 60255-27:2013
Reverse Polarity and Slow Ramp:	IEC 60255-27:2013

Dielectric Strength and Impulse Tests

Impulse:	EN 60255-27:2013 Impulse Severity: 5 kV IEEE C37.90-2005 Severity Level: 0.5 J, 5 kV
Dielectric (HiPot):	IEC 60255-27:2013 IEEE C37.90-2005 Dielectric Withstand Severity: 2.5 kV _{RMS} for 1 minute

RFI and Interference Tests**EMC Immunity**

Slow Damped Oscillatory Waves:	IEC 61000-4-18:2006 + A1:2010 Severity Level: 2.5 kV common mode 1 kV differential mode
Electrostatic Discharge Immunity:	IEC 60255-26:2013 IEC 61000-4-2:2008 Severity Level: 6 kV contact discharge 8 kV air discharge IEEE C37.90.3-2001 Severity Level: 8 kV contact discharge 15 kV air discharge
Conducted RF Immunity:	IEC 60255-26:2013 IEC 61000-4-6:2008 Severity Level: 10 Vrms
Radiated RF Immunity:	IEC 60255-26:2013 IEC 61000-4-3:2006 + A1:2007 + A2:2010 Severity Level: 10 V/m unmodulated IEEE C37.90.2-2004 Severity Level: 20 V/m unmodulated

Surge Immunity:	IEC 60255-26:2013 Severity Level: Zone A IEC 61000-4-16:1998 + A2:2009 Severity Level: Zone 4
Fast Transient, Burst Immunity:	IEC 60255-26:2013 IEC 61000-4-4:2012 Severity Level: Zone A, 4 kV
Magnetic Field Immunity:	EN 61000-4-8:2010 Severity Level 5: 1 minute, 100 A/m Axion Applications: 3 seconds, 1000 A/m (±2.7deg and ±50 mA trip threshold on current channels) TiDL Applications: 3 seconds, 1000 A/m (50SQ1P = 0.07, ±50 mA trip threshold on instantaneous current elements) Severity Level 4: 3 seconds, 300 A/m Note: Performance evaluated with 1 A nominal current for both applications. EN 61000-4-9:1994 + A1:2001 Severity Level: 1000 A/m, Level 5 EN 61000-4-10:2001 Severity Level: 100 A/m at 100 kHz and 1 MHz, Level 5
Surge Withstand Capability Immunity:	IEEE C37.90.1-2002 Severity Level: 2.5 kV oscillatory 4.0 kV fast transient

Emissions

Radiated and Conducted Emissions:	IEC 60255-26:2013 EN 55011:2009 for below 1 GHz EN 55022:2010 for above 1 GHz Severity Level: Class A Canada ICES-001 (A) / NMB-001 (A)
-----------------------------------	---

© 2017-2022 by Schweitzer Engineering Laboratories, Inc. All rights reserved.

All brand or product names appearing in this document are the trademark or registered trademark of their respective holders. No SEL trademarks may be used without written permission. SEL products appearing in this document may be covered by U.S. and Foreign patents.

Schweitzer Engineering Laboratories, Inc. reserves all rights and benefits afforded under federal and international copyright and patent laws in its products, including without limitation software, firmware, and documentation. Portions © 1982-2013, QNX Software Systems Limited under license to SEL.

The information in this document is provided for informational use only and is subject to change without notice. Schweitzer Engineering Laboratories, Inc. has approved only the English language document.

This product is covered by the standard SEL 10-year warranty. For warranty details, visit selinc.com or contact your customer service representative.

SCHWEITZER ENGINEERING LABORATORIES, INC.

2350 NE Hopkins Court • Pullman, WA 99163-5603 U.S.A.

Tel: +1.509.332.1890 • Fax: +1.509.332.7990

selinc.com • info@selinc.com

