

# SEL-751

## Feeder Protection Relay




### Advanced feeder protection in a powerful, versatile relay

- Provide comprehensive feeder protection in utility and industrial power systems.
- Protect workers and equipment by using high-speed arc-flash mitigation technology.
- Apply advanced protection functions, such as high-impedance fault and intermittent ground fault (IGF) detection.
- Customize the SEL-751 for your application with low-energy analog (LEA) inputs and expanded I/O modules.
- Integrate the SEL-751 into your system using Ethernet protocols that include IEC 61850 Edition 2.1, DNP3, EtherNet/IP, Modbus, and High-availability Seamless Redundancy (HSR).



# Functional Overview

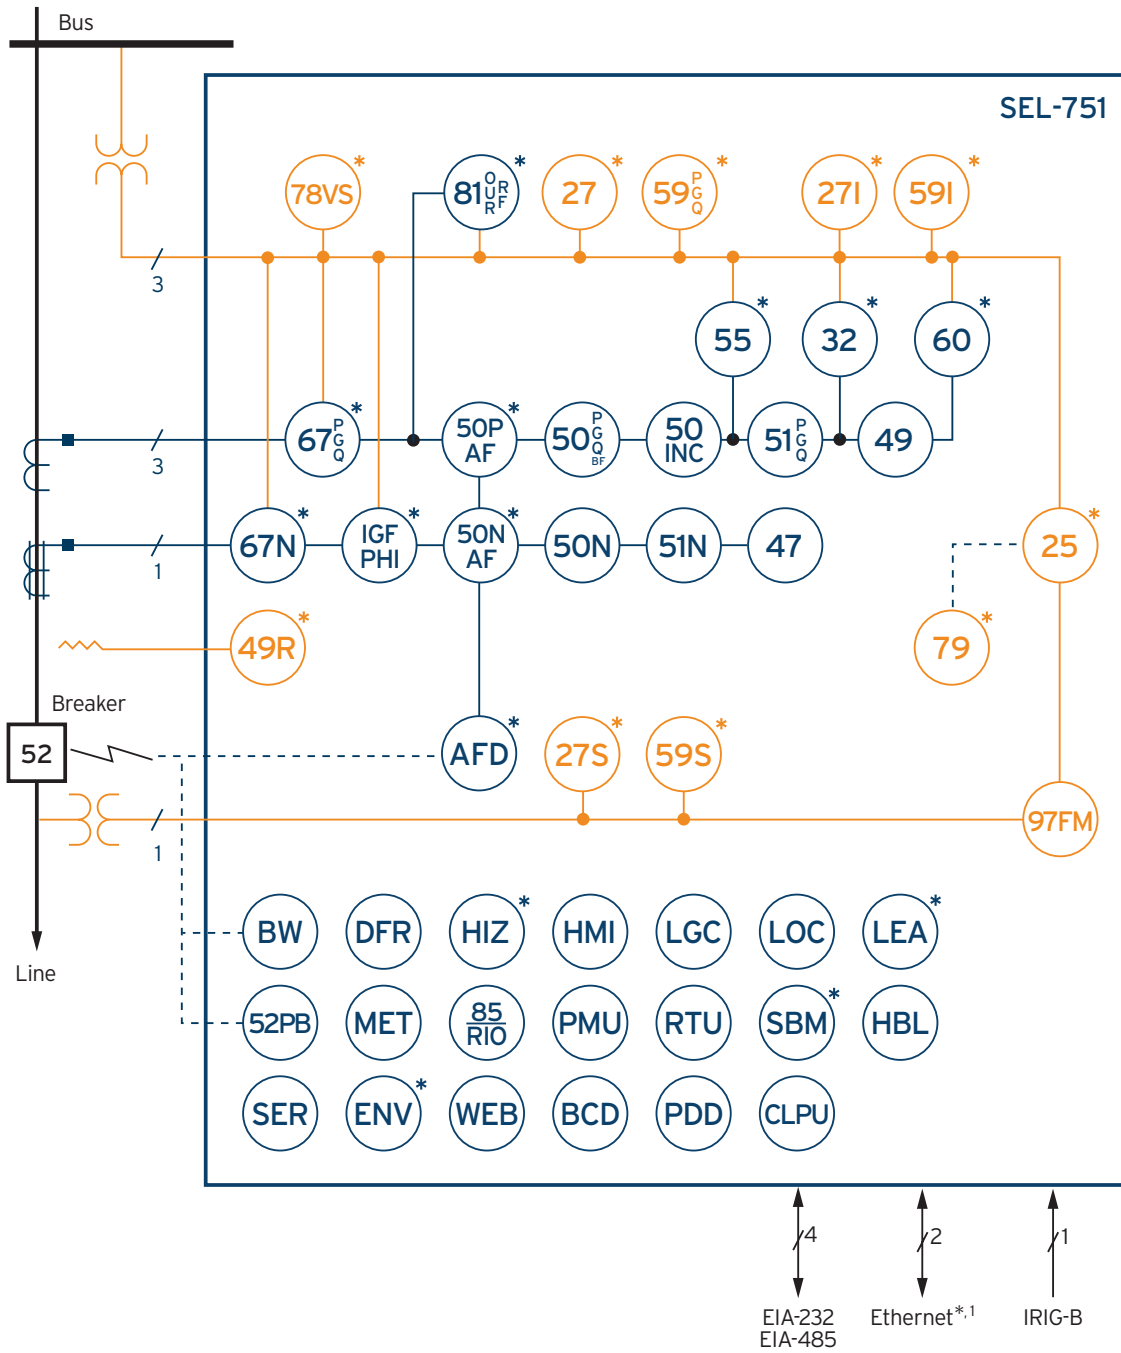

\*Optional Feature <sup>1</sup>Copper or Fiber-Optic

## ANSI Numbers/Acronyms and Functions

25	Synchronism Check*
27	Definite-Time Undervoltage*
271	Phase Undervoltage With Inverse Characteristic*
27S	Synchronism-Check Undervoltage*
32	Directional Power*
47	Phase Reversal
49	IEC Cable/Line Thermal
49R	RTD Thermal*
50	Adaptive Overcurrent
50 (P,G,Q)	Overcurrent (Phase, Ground, Negative Sequence)
50BF	Breaker Failure
50INC	Incipient Cable Fault Detection
50N	Neutral Overcurrent
50N AF	Arc-Flash Neutral Overcurrent*
50P AF	Arc-Flash Phase Overcurrent*
51 (P,G,Q)	Time Overcurrent (Phase, Ground, Negative Sequence)
51N	Neutral Time Overcurrent
52PB	Trip/Close Pushbuttons
55	Power Factor*
59 (P,G,Q)	Definite-Time Overvoltage (Phase, Ground, Negative Sequence)*
59I	Overvoltage With Inverse Characteristic*
59S	Synchronism-Check Overvoltage*
60	Loss of Potential*
67 (P,G,Q)	Directional Overcurrent (Phase, Ground, Negative Sequence)*
67N	Directional Neutral Overcurrent*
78VS	Vector Shift*
79	Autoreclosing*
81 (O,U,R,RF)	Over-/Underfrequency (Rate, Fast Rate)*

## Additional Functions

85 RIO	SEL MIRRORRED BITS® Communications
97FM	Frequency Component Detection
AFD	Arc-Flash Detection*
BCD	Broken-Conductor Detection
BW	Breaker Wear Monitoring
CLPU	Cold-Load Pickup
DFR	Event Reports
ENV	SEL-2600 RTD Module Support*
HBL	Harmonic Blocking
HIZ	SEL Arc Sense™ Technology (AST)*
HMI	Operator Interface
LDE	Load Encroachment
LDP	Load Data Profiling
LEA	Rogowski Coil or LPCT Inputs and LEA AC Voltage Inputs (8 Vac RMS)*
LGC	SELogic® Control Equations
LOC	Fault Locator
PDD	Phase Discontinuity Detection
PMU	Synchrophasors
RTD	10 Internal or 12 External (see ENV) RTD Inputs*
RTU	Remote Terminal Unit
SBM	Station Battery Monitor*
SER	Sequential Events Recorder
THD	Total Harmonic Distortion*
WEB	Web Server

\*Optional Feature

# Key Features

## Feeder Protection

Protect radial and looped distribution circuits with comprehensive protection capabilities, including time overcurrent, directional overcurrent, autoreclosing, over-/undervoltage, frequency, cable/line thermal, and more.

## LEA Sensor Inputs

Apply the SEL-751 in applications that use low-energy current/voltage sensors. LEA sensors for measurement of primary voltages and currents offer excellent linearity, a wide dynamic range, reduced size and weight, and enhanced personnel safety. The LEA current/voltage input card supports three current channels that are either Rogowski coil or low-power current inputs, three LEA voltage sensor inputs, and one 200 mA neutral input. LEA current and voltage channels accept an RJ45 connector input, and the 200 mA neutral channel accepts a terminal block input.

## Expanded Arc-Flash Solutions

Improve safety with options for either four or eight arc-flash detection (AFD) inputs to improve arc-flash coverage. The SEL-751 Feeder Protection Relay offers combined light and high-speed overcurrent detection for arc-flash events. This combination provides the ideal solution for speed and security.

## Ground Fault Detection and Directional Control

Protect ungrounded, high-impedance grounded, resonant-grounded, and Petersen coil-grounded systems with your choice of several options. Use the optional 200 mA neutral input for sensitive earth fault protection with the directional element of the relay or for nondirectional protection. IGF detection and a zero-sequence phi element identify ground faults and their direction, sending a trip command when the fault count exceeds the threshold you set.

## Flexible I/O Options

Order the SEL-751 with the I/O needed to support your application and allow for future expansion. Choose from a wide array of field-upgradable I/O cards for the back of the relay. Provide ample capacity for automation and control applications by ordering up to four extended I/O modules; each module provides either 21 programmable inputs or 12 contact outputs.

## High-Impedance Fault Detection

Detect downed conductors, even on poorly conducting surfaces, with SEL Arc Sense technology (AST). AST algorithms detect arcing produced by some high-impedance faults and will send an alarm or trip the breaker. This technology provides an added level of protection and mitigates wildfire risk by quickly clearing faults that traditional overcurrent detection can fail to detect.

## Open-Conductor Detection

Apply the SEL-751 to detect and isolate open conductors. The SEL-751 incorporates phase discontinuity detection and optional broken-conductor detection to provide a reliable solution for open-conductor faults that convert to high-impedance faults.

## Automation and Control

Apply the SEL-751 on feeders to provide protection, automation, and control capabilities, all in one package. SELoGic torque control equations support many automated applications without the need for additional automation controllers. The configurable front-panel pushbuttons can replace conventional panel controls and simplify overall applications and wiring.

## Event Analysis

Conduct post-event analysis more efficiently with detailed event records. You can combine oscillographic and digital information to find root cause. Adding a satellite-synchronized time source, like an SEL satellite-synchronized clock (e.g., SEL-2401 or SEL-2407<sup>®</sup>), provides convenient alignment of event information from multiple devices.

## Reliable in Harsh Environments

All SEL relays are designed to operate in harsh environments where other relays may fail. The SEL-751 operates in extreme conditions, with an operating temperature of  $-40^{\circ}$  to  $+85^{\circ}\text{C}$  ( $-40^{\circ}$  to  $+185^{\circ}\text{F}$ ), and is designed and tested to exceed applicable standards, including vibration, electromagnetic compatibility, and adverse environmental conditions. In addition, the SEL-751 is ATEX- and Underwriters Laboratories (UL) Class I, Division 2-certified for use in hazardous and potentially explosive environments.

## Flexible Communications

Advanced protocols support communications using legacy and modern supervisory and control systems. These protocols include IEC 61850 Edition 2.1, HSR, the Rapid Spanning Tree Protocol (RSTP), EtherNet/IP, the IEEE 1588 Precision Time Protocol (PTP) (firmware-based), IEC 60870-5-103, DNP3, Modbus TCP/IP, Telnet, the File Transfer Protocol (FTP), the Simple Network Time Protocol (SNTP), MIRRORING BITS communications, and ASCII. In addition, the IEC 61850 test mode in the SEL-751 enables in-service testing, which reduces commissioning time.

## Cold-Load Pickup Element

Cold-load pickup is the phenomenon that takes place when a distribution circuit is re-energized following an extended outage of that circuit. Cold-load pickup can result in current levels that are significantly higher than normal peak load levels. This excess amount of current draw could be falsely identified as an overcurrent condition by the relay. The cold-load pickup element identifies possible cold-load pickup events per the settings in a distribution line after an outage.



# Product Overview



The 5-inch color display with a resolution of 800 × 480 offers direct navigation via a capacitive touchscreen.

A full onscreen keyboard facilitates easy adjustment of settings.

Folders and applications provide quick access to bay screens, metering and monitoring data, reports, settings, and more.

The front panel is available in English or Spanish.

The home pushbutton allows users to easily return to the default home screen.




Add up to four optional extended I/O modules.

## Conventional CT and PT Input Option

A wide variety of communications protocols and media provide flexibility to communicate with other devices and control systems.

Accelerate firmware downloads via the Ethernet port.

Power supply options include 110–250 Vdc/110–240 Vac or 24–48 Vdc.

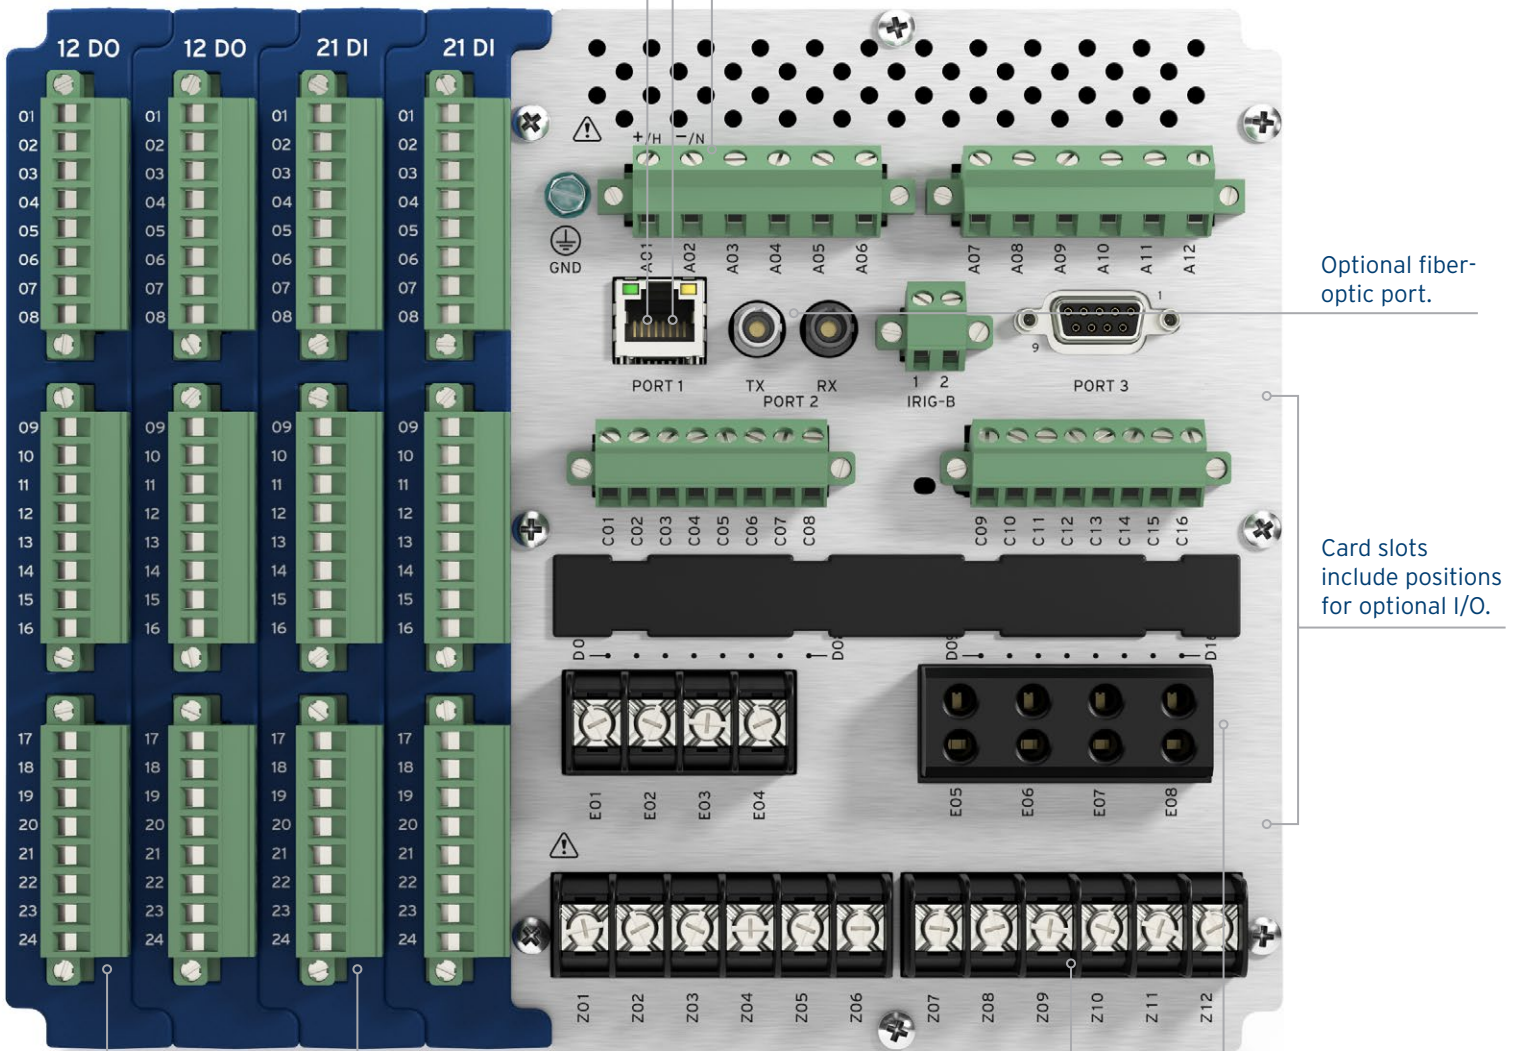

Optional fiber-optic port.

Card slots include positions for optional I/O.


Optional input module provides 21 programmable inputs.

Conventional CT and PT inputs.

Card slot for optional 8 AFD, Vsync/Vbat/4 AFD, or Vsync/Vbat/7 DI card.

Optional output module provides 12 contact outputs.

## LEA Current and Voltage Input Option

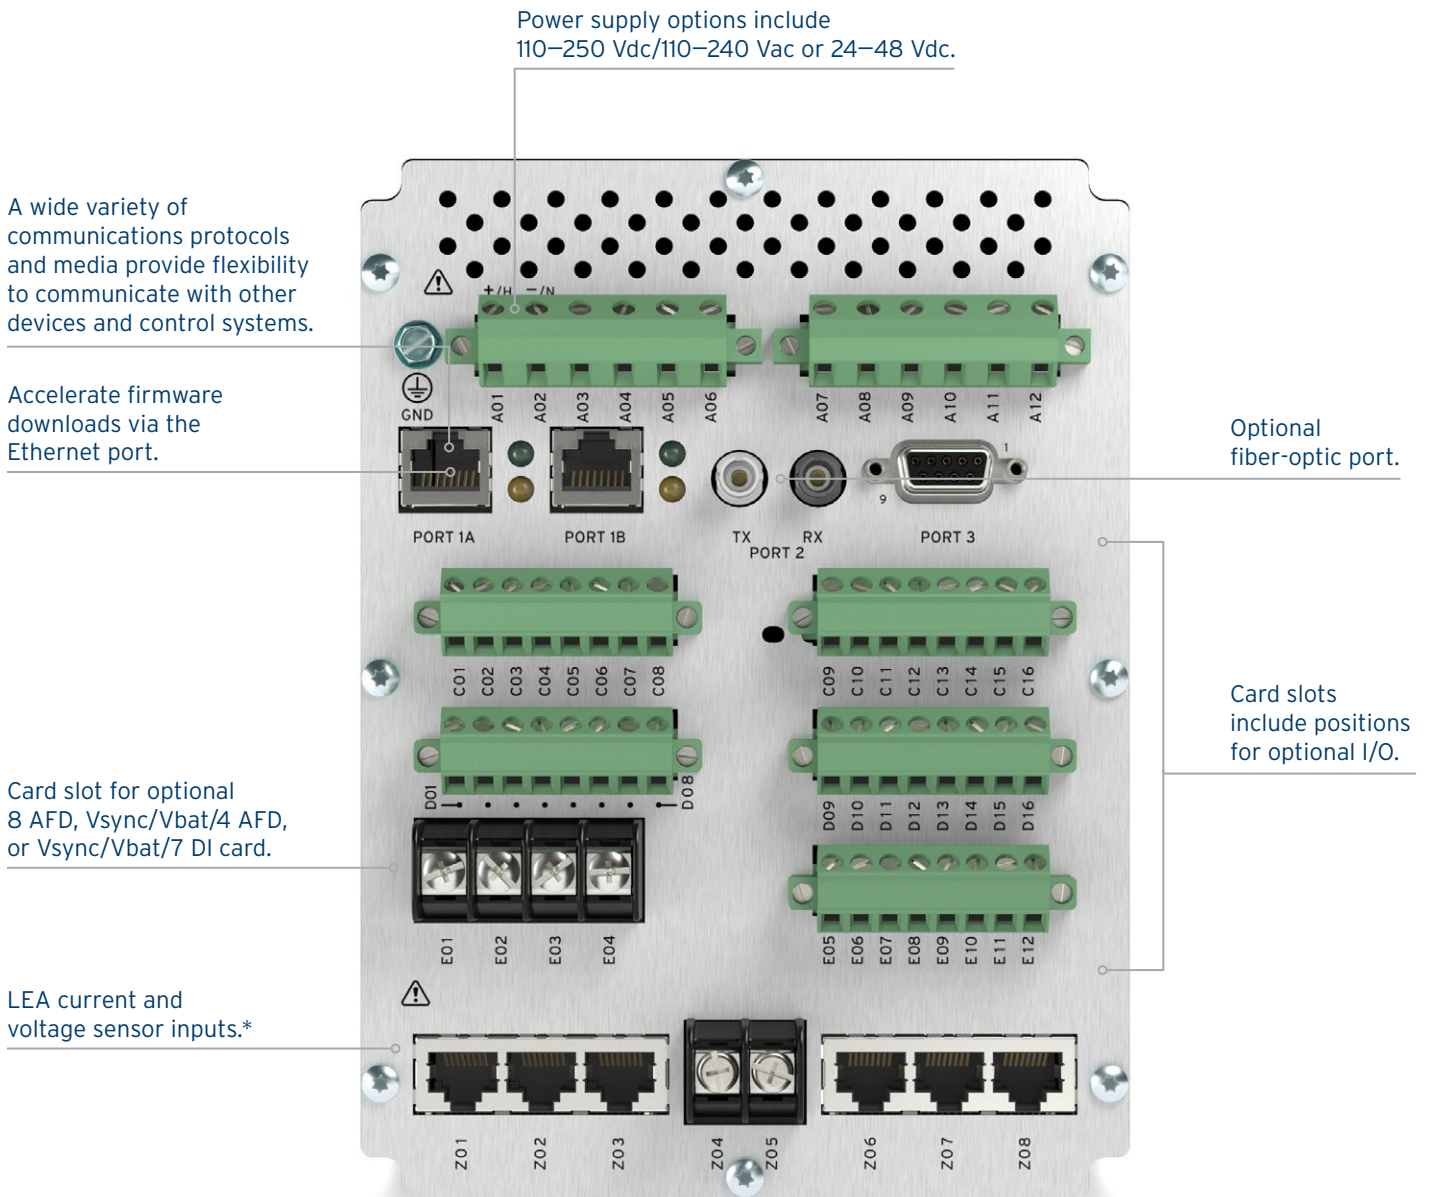

\*Compliant with IEC 61869-6, -13 standards.


# Touchscreen Display Features and Functions

The SEL-751 5-inch, 800 × 480 color touchscreen display mimics a one-line diagram for bay control and monitoring. With it, you can view metered quantities, phasor diagrams, relay settings, event summaries, target statuses, and Sequential Events Recorder (SER) data.

## Bay Screens and Bay Control

Select from predefined bay screens, or configure as many as five custom bay screens using the ACSELERATOR® Bay Screen Builder SEL-5036 Software and ACSELERATOR QuickSet® SEL-5030 Software. You can control one breaker, eight two-position disconnects, and two three-position disconnects and can view analog and digital data in a contextual display.


To control a breaker or disconnect, simply tap the Bay Screens application on the home screen and then the breaker or disconnect you want to control.

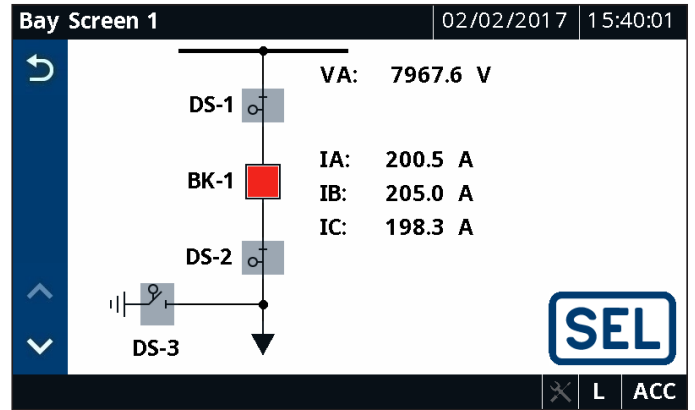

Next, enter your Level 2 password and tap Submit. The onscreen keyboard allows you to quickly and easily enter passwords, search for Relay Word bits, and enter settings.



Finally, tap Trip or Close to control the breaker. When asked to confirm the action before the operation is completed, choose Yes or No.

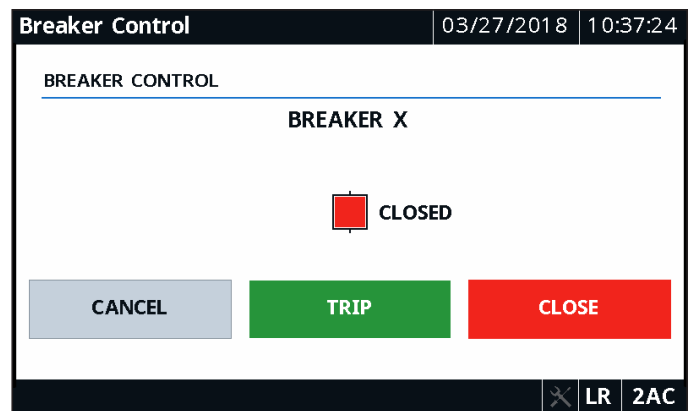


### Meter Fundamentals

View the real, reactive, and apparent power of each phase in your system, and monitor the power factor information to determine if the phase current leads or lags the phase voltage.

Fundamental Metering		02/02/2017	15:32:42
	A	B	C
P (kW)	<b>21783</b>	<b>21732</b>	<b>21763</b>
Q (kVAR)	<b>1097</b>	<b>1068</b>	<b>1071</b>
S (kVA)	<b>21811</b>	<b>21758</b>	<b>21790</b>
PF	<b>0.95 LEAD</b>	<b>0.97 LEAD</b>	<b>0.95 LEAD</b>

### Meter Phasors

View a graphical and textual representation of the real-time voltages and currents in a power system during balanced and unbalanced conditions. By analyzing the phasors, you can determine power system conditions.

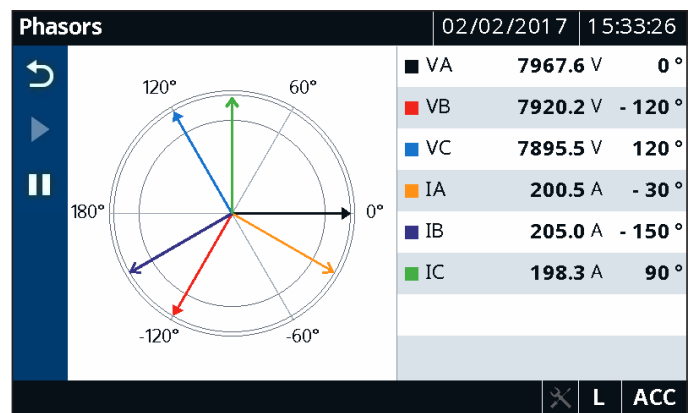

### Meter Energy


Display the real, reactive, and apparent energy metering quantities imported and exported by your system. You can reset the energy values via the display and record the time and date of reset. Whether your system is a net energy producer or consumer, metered quantities accurately account for the power system energy flow.

Energy Metering		02/02/2017	15:34:11
MWh3P-IN (MWh)	<b>25.512</b>	MWh3P-OUT (MWh)	<b>2342.175</b>
MVARh3P-IN (MVARh)	<b>15.234</b>	MVARh3P-OUT (MVARh)	<b>1257.256</b>
MVAh3P (MVAh)	<b>3158.489</b>	LAST RESET	<b>01/24/2017 21:08:47</b>

# Applications


## Feeder Protection

Provide comprehensive protection capabilities, including time overcurrent, directional overcurrent, over-/undervoltage, autoreclosing, frequency, and much more.

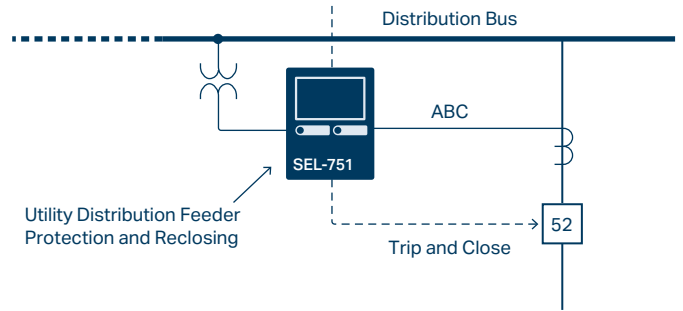


## Sensitive 67N or 50N for Grounded Systems

With the 200 mA neutral current input, the SEL-751 is ideal for sensitive-ground directional or nondirectional overcurrent protection applications in systems with a wide variety of grounding configurations. The sensitive neutral element detects ground faults and identifies whether the ground fault is forward or reverse of the protective device.

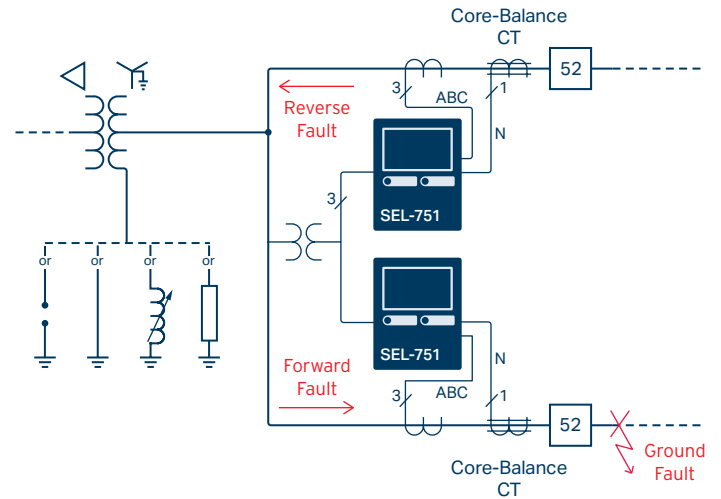

## Coordinate Protection

Use SEL MIRRORED BITS or IEC 61850 GOOSE communications to coordinate upstream protection if a fault occurs. Coordination and fast bus trip schemes allow short delays (two or three cycles) for backup protection, reducing arc-flash energy.

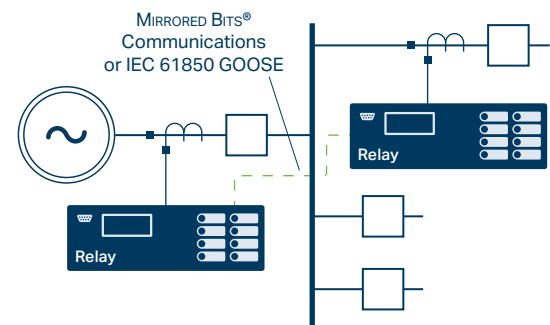


# Reduce Arc-Flash Hazards

The SEL-751 combines light-sensing technology with fast overcurrent protection to provide high-speed AFD as fast as 2 milliseconds without false tripping.


Fast and secure arc-flash mitigation reduces the incident energy of arc-flash events. SEL-751 relays also have integration and communications features for secure remote access to help you keep out of the danger zone while gathering important real-time and historical data from the relays. You can coordinate protection for faster clearing times and stay outside the danger zone completely with wireless or remote communications.

If you must be in the danger zone, know the dangers and wear appropriate personal protective equipment. If you do not know the arc-flash ratings and zones for your gear, the SEL Engineering Services team provides professional arc-flash hazard studies and practical approaches to mitigate arc-flash risks.

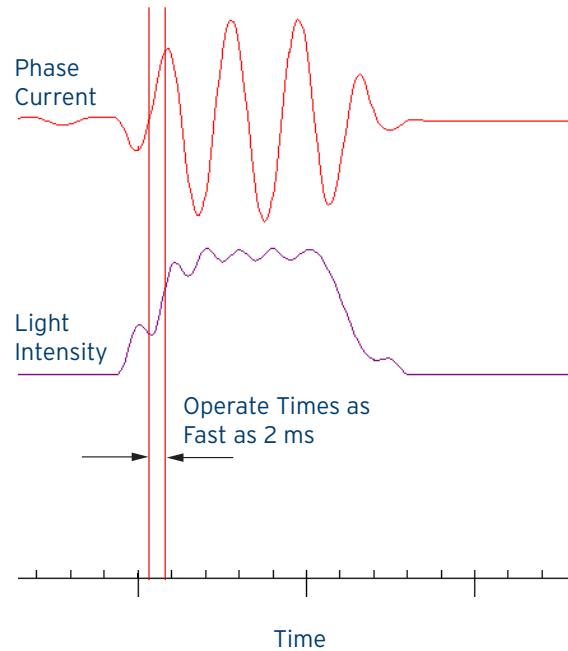

## Arc-Flash Mitigation

Improve safety and prevent damage with AFD in the SEL-751. Point sensors, window sensors, loop sensors, or a combination protect a variety of switchgear configurations. You can order either four or eight arc-flash sensor inputs. The high-speed output contacts obtain the fastest response to arcing faults.

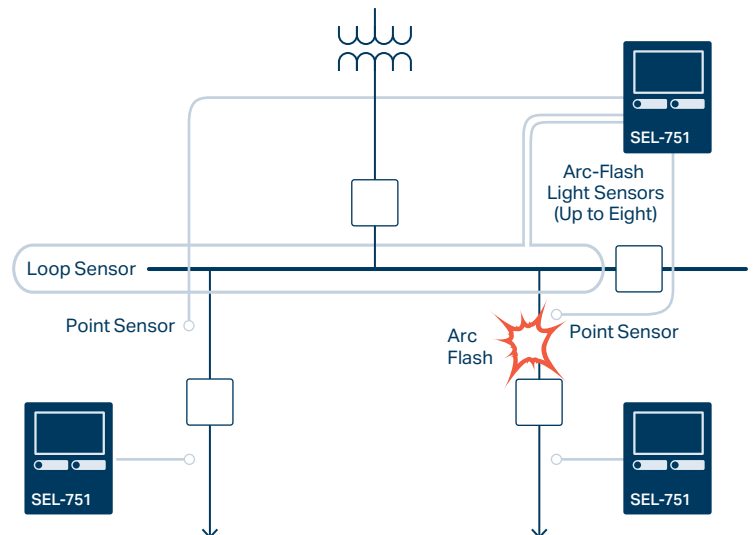


# Easy to Set and Use

## Use QuickSet Software to Set, Monitor, and Control the SEL-751

With QuickSet, you can:


- Save engineering time while keeping flexibility. Communicate with the SEL-751 through any ASCII terminal, or use the QuickSet graphical user interface.
- Develop settings offline with a menu-driven interface and completely documented help screens. You can speed up installation by copying existing settings files and modifying application-specific items.
- Simplify the setting procedure with the rules-based architecture to automatically check interrelated settings. Out-of-range or conflicting settings are highlighted for correction.

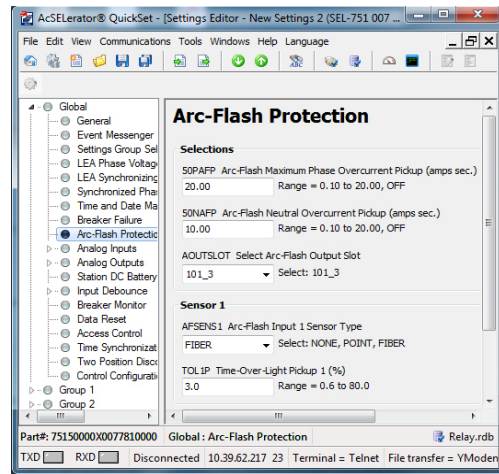

## Use SEL-5601-2 Synchrowave® Event Software to Retrieve and Display Event Reports Recorded by the SEL-751

With Synchrowave software, you can:

- Display event report oscillograms. You can view each report as a plot of magnitude versus time and select analog and digital points to build a custom display. You can analyze arc-flash events using light intensity and phase current waveforms recorded during the arc fault.
- Display phase and symmetrical component phasors. Displaying the phasor view of electrical data helps you better understand asymmetrical, three-phase faults. You can build a custom plot using per-phase and symmetrical component sequence currents and voltages.
- Retrieve event reports using serial or Ethernet communications links.

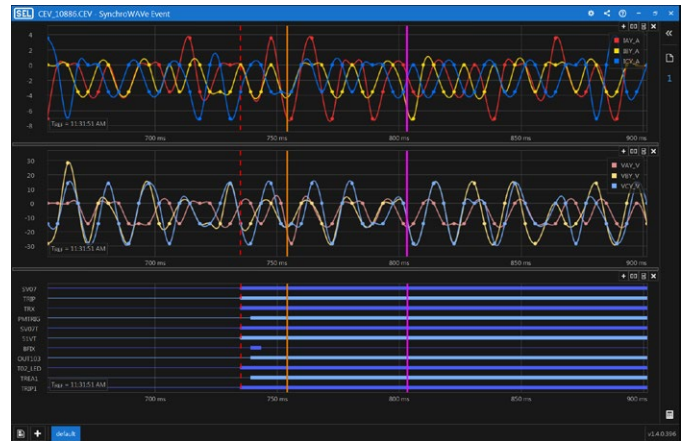

## Get Information Easily With the Integrated Web Server

Access basic SEL-751 information on a standard Ethernet network with the built-in web server. You can view the relay status, SER data, metering information, and settings with easy access within a local network. For increased security, web server access requires a relay password and the information is limited to a read-only view. You can also upgrade relay firmware through the web server.

GROUP 1 (SHO)			
Line Configuration			
CTRw := 200	CTRk := 200	PTRY := 2000.0	VNDMY := 115
PTRZ := 2000.0	VNDZ := 115	ZIMAG := 7.80	ZIANG := 84.00
ZDMSG := 24.80	ZDANG := 81.50	BFLCC := Y	
Relay Configuration			
E21MP := 3	E21XP := 3	E21MG := 3	E21YG := N
ECVT := N	ECOTD := N	ES0TF := Y	ES0OS := N
ELDAD := Y	ESIP := 1	ESG := N	ESOR := N
E31 := N	E31 := N	E21 := N	E39 := N
E32 := AUTO	ECORP := N	BBFL1 := N	E23BK1 := N
E79 := Y	EBANCL := Y	ELOP := Y	EEDB := N
EADVS := N			
Who Phase Distance Element Reach			
Z1MP := 6.24	Z2MP := 9.36	Z3MP := 1.87	
Quad Phase Distance Element Reach			
XP1 := OFF	XP2 := OFF	XP3 := OFF	
Phase Distance Element Time Delay			
Z1PD := 0.000	Z2PD := 20.000	Z3PD := 60.000	
Who Ground Distance Element Reach			
Z1MG := 6.24	Z2MG := 9.36	Z3MG := 1.87	
Zero-Sequence Compensation Factor			
k0M1 := 0.726	k0A1 := -3.69		

# SEL-751 Options

## Expansion Cards

4 Digital Inputs (DI), 4 Digital Outputs (DO)
4 DI, 4 DO With High-Speed, High-Current DO
4 DI, 3 DO (2 Form C, 1 Form B)
3 DI, 4 DO, 1 Analog Output (AO)
4 Analog Inputs (AI), 4 AO
8 AI
8 DI
14 DI
10 RTD Inputs
8 DO
Three-Phase AC Voltage Inputs (300 Vac)
LEA Voltage Inputs (8 Vac RMS)
LEA Voltage Sensor Inputs, Rogowski Coil/LPCT Inputs, and Conventional 200 mA Sensitive Neutral Input
8 AFD Inputs
Vsync, Vbat, 4 AFD Inputs
Vsync, Vbat, 7 DI

## Extended I/O Modules

Input Module: 21 Programmable Inputs
Output Module: 12 Contact Outputs

## Other Options

Conformal Coating
Configurable Labels
SEL-4520 Arc-Flash Test Module
SEL-C804/SEL-C814 Fiber-Optic AFD Sensors and Accessories



Order either four or eight arc-flash sensor inputs.

## Retrofit Replacement Kits

Mount the SEL-751 into multiple locations using our complete line of mounting and enclosure options. You can choose from panel-mount, rack-mount, wall-mount, indoor, or outdoor configurations.

No cutting or drilling is required when you use the optional mounting kits. Replacing existing protection is quick and easy!

Visit [selinc.com/app/mounting-selector](http://selinc.com/app/mounting-selector) to see the complete selection of mounting and enclosure kits.



# SEL-751 Specifications

## General

<b>Displays</b>	2 × 16-character LCD 5-inch color touchscreen display, 800 × 480 pixels
<b>AC Current Inputs</b>	5 A or 1 A phase and 5 A, 1 A, or 200 mA neutral
<b>Rogowski Coil-Based AC Current Inputs (RJ45)</b>	30 Vac (phase-to-neutral) continuous, $\pm 185 V_{\text{peak}}$ , 200 Vac for 10 seconds Compliant with IEC 61869-10 standard
<b>LPCT Inputs (RJ45)</b>	4 Vac continuous, $\pm 11.3 V_{\text{peak}}$ , 200 Vac for 10 seconds
<b>AC Voltage Inputs</b>	300 Vac continuous, 600 Vac for 10 seconds
<b>LEA Voltage Inputs</b>	8 Vac (phase-to-neutral), $\pm 12 V_{\text{peak}}$ , 300 Vac for 10 seconds
<b>LEA Voltage Sensor Inputs (RJ45)</b>	8 Vac (phase-to-neutral), $\pm 12 V_{\text{peak}}$ , 200 Vac for 10 seconds Compliant with IEC 61869-11 standard
<b>Output Contacts</b>	The relay supports Form A, B, and C outputs.
<b>Optoisolated Control Inputs</b>	DC/AC control signals: 250, 220, 125, 110, 48, or 24 V As many as 26 inputs are allowed in ambient temperatures of 85°C (185°F) or less. As many as 34 inputs are allowed in ambient temperatures of 75°C (167°F) or less. As many as 44 inputs are allowed in ambient temperatures of 65°C (149°F) or less.
<b>Frequency and Phase Rotation</b>	System frequency: 50, 60 Hz Phase rotation: ABC, ACB Frequency tracking: 15–70 Hz (requires ac voltage inputs)
<b>Arc-Flash Time-Overlight® Elements (TOL1–TOL8)</b>	Pickup time: 2–5 ms Dropout time: 1 cycle
<b>Communications Protocols</b>	SEL (Fast Meter, Fast Operate, and Fast SER), Modbus TCP/IP, Modbus RTU, DNP3, FTP, IIRIG-B, Telnet, SNTP, EtherNet/IP, firmware-based IEEE 1588 PTP, IEC 61850 Edition 2.1, IEC 60870-5-103, the Parallel Redundancy Protocol (PRP), HSR, RSTP, MIRRORING BITS communications, and IEEE C37.118-2005 (synchrophasors).
<b>Language Support</b>	English and Spanish
<b>Power Supply</b>	110–250 Vdc or 110–240 Vac Input voltage range: 85–300 Vdc or 85–264 Vac 24–48 Vdc Input voltage range: 19.2–60 Vdc
<b>Operating Temperature</b>	–40° to +85°C (–40° to +185°F) Note: LCD contrast is impaired for temperatures below –20°C (–4°F) and above +70°C (+158°F).
<b>Certifications</b>	To view certifications for the SEL-751, please visit <a href="https://selinc.com/company/certifications">selinc.com/company/certifications</a> .

## SCHWEITZER ENGINEERING LABORATORIES

Making Electric Power Safer, More Reliable, and More Economical  
+1.509.332.1890 | [info@selinc.com](mailto:info@selinc.com) | [selinc.com](https://selinc.com)

