


SEL-2440 Discrete Programmable Automation Controller



Powerful control and I/O.

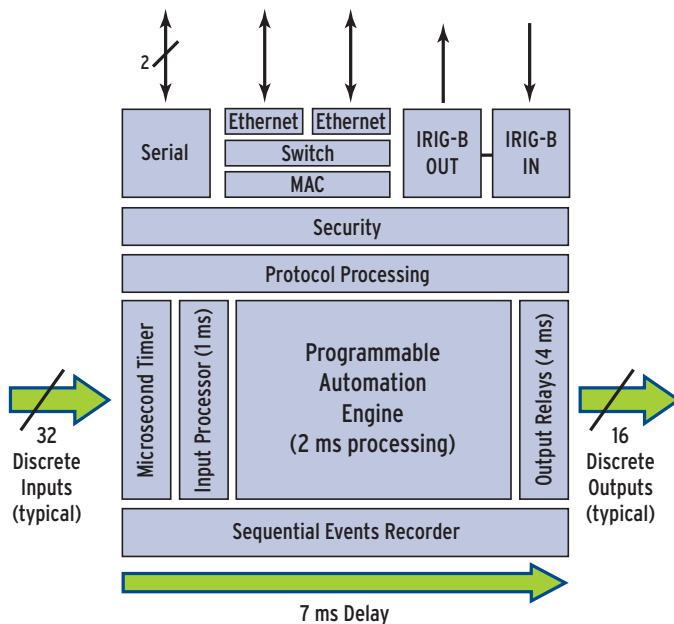

Features and Benefits

48 Digital I/O Points at an Economical Price

Distributed I/O Right Out of the Box

- Preprogrammed register maps
- Select protocol and address via switches behind front panel

Fast and Powerful

- 2 ms processing interval
- 7 ms from input to output: auxiliary relay speed
- Events timed to the *microsecond*

A Great Communicator and Interpreter

Supported Protocols	Serial	Ethernet
DNP3	✓	✓
Modbus	✓	✓
MIRRORED BITS® communications	✓	
SEL Fast Message	✓	
IEC 61850		✓

Convenient Maintenance and Support

- Removable terminal blocks with positive retention
- Continuous self-monitoring diagnostics
- LEDs for system status, every I/O point, and communications port
- Front-panel management port

SEL Quality, Standards, and Global Support

- 2000 Vac/2500 Vdc HiPot
- 8 kV contact/15 kV air ESD tested
- IEEE C37.90-1989
- IEEE 1613-2003 standard
- IEC 60255 protective relay standards


Easy Setup

1




UNPACK AND INSPECT

2

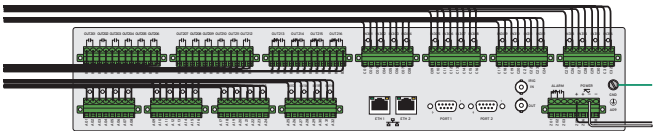

WIRE IT

3

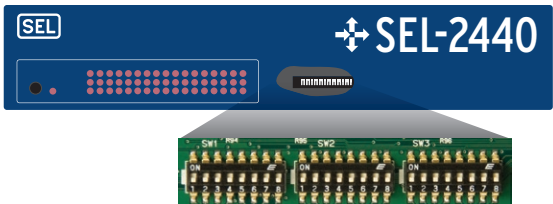

SET PROTOCOL AND ADDRESS USING DIP SWITCHES


4



- Press lamp test for:
- LED status
 - Port address check
 - Time-code check

POWER UP AND VERIFY STATUS


5

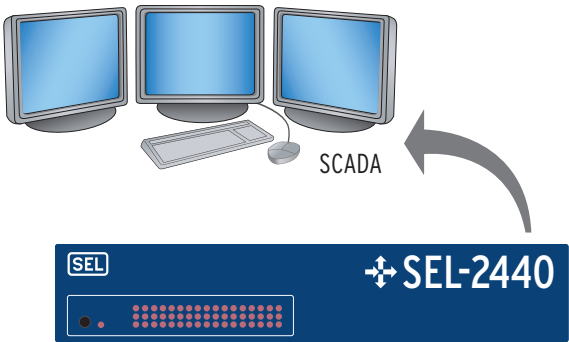

VERIFY CONTACT STATUS WITH MASTER

Job Done®

Distributed I/O Expandable to Thousands of Points

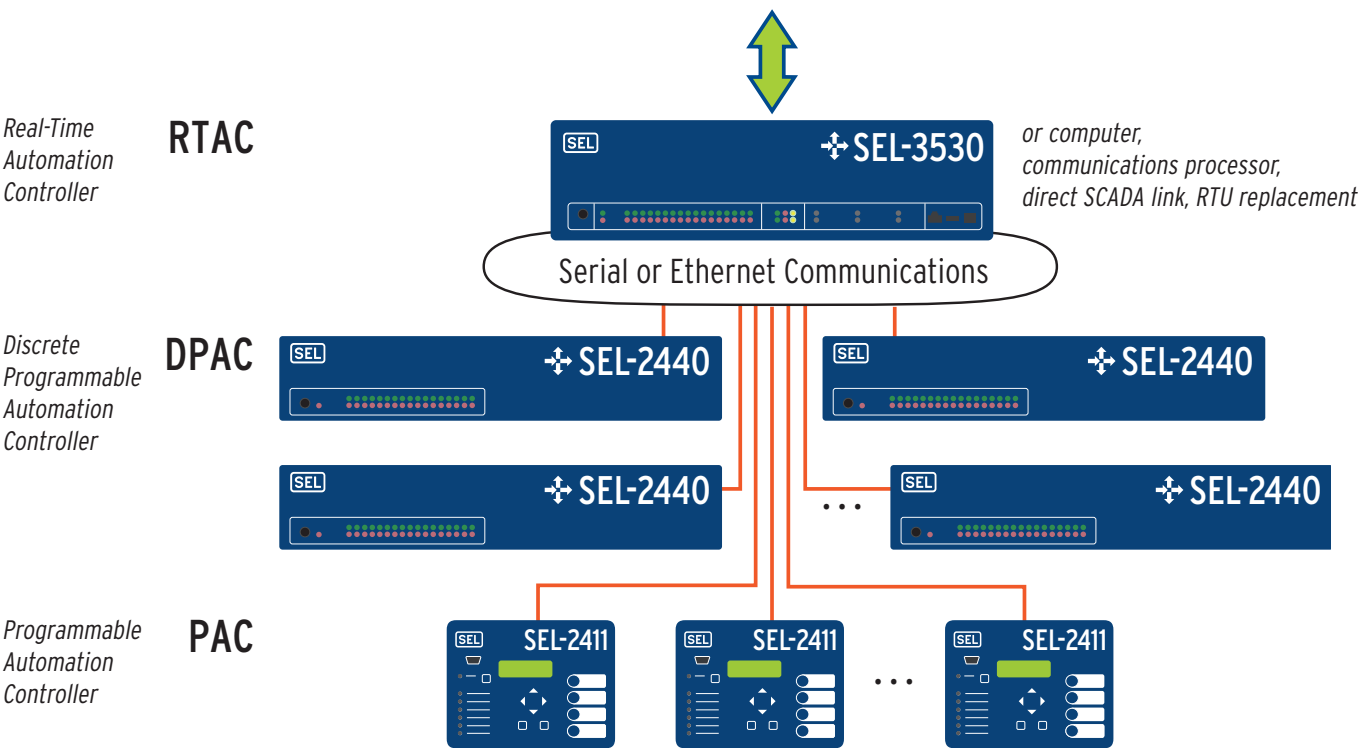

Simplify Settings, Analysis, and Design Using acSELERATOR® Software



Frequently Asked Questions

What if I burn out a relay contact in a DPAC?

First, SEL has a ten-year, no-questions-asked warranty. If you burn out a contact, SEL will repair your DPAC usually within 72 hours. Second, the DPAC is entirely connectorized, so you can easily remove it from service without removing any wires from the connectors. Simply download your settings to a spare unit and insert the connectors for a fast, simple, and economical repair.

Can I expand the I/O of the DPAC?

Yes! The base product typically has 32 inputs and 16 outputs. Want some more? You can add two SEL-2505 Remote I/O Modules (8 in/8 out), one per serial port, for a total of 32 more points. . . for a grand total of 80 I/O points! It can also be cost-effective to simply add another DPAC and double the I/O.

Where is the DPAC designed and made?

It is designed and manufactured in our factory in Pullman, Washington. The DPAC firmware was developed by SEL in Pullman too.

Can I hook two DPACs back-to-back? What kind of performance can I get?

You may be familiar with our SEL-2505 Modules. They communicate 8 points in each direction, so that 8 inputs at one end are 8 outputs at the other, and vice versa. You can do exactly this with 8 inputs and 8 outputs of each DPAC and still have your other I/O. End-to-end delay is about 7 ms. Or, you can use IEC 61850 GOOSE messaging and the Ethernet ports to communicate any desired combination of I/O points; e.g., 16 inputs to 16 outputs one way and 8 inputs to 8 outputs going back.

How can I apply the DPAC in my system?

You can use it as a standalone controller or digital concentrator. Or, you can use the DPAC as a host or I/O expansion for the SEL-2411 Programmable Automation Controller (PAC) that also supports low-level dc or ac analog inputs. For automation and control applications, you can use the SEL-3530 RTAC or our embedded computers. You can also connect your DPAC to SEL-2020, -2030, -2032 communications processors via our SEL protocols, or easily integrate with your existing SCADA infrastructure with DNP3 and Modbus protocols over Ethernet or serial connections.

This is a new product for me. How can SEL assist me?

If you are already familiar with the SEL-2411 PAC, then you will be right at home with the DPAC. They have the same roots. The DPAC is actually easier, because it doesn't need to handle analog signals. If you have never used an SEL device, then now is the time! We have field application engineers around the world who are ready to assist you with your designs at no charge. Or, our systems engineering team can develop a detailed custom design for you in accordance with your needs at reasonable fees. Or, if your local consultant wants help, we are prepared to support him or her as well.

Your literature stresses that you guarantee performance to various standards. What does this mean?

The design engineers at SEL understand these standards, and they know that their designs must not only comply but also have margin *beyond* the standard. For instance, standards require a dielectric strength test (HiPot) of 2000 Vac. SEL adds margin onto the standard and requires the product pass at 2500. . . for a 25 percent margin above the standard! This requires careful attention to clearances, spacing, and many other parameters. Unfortunately, there are many devices, costing much more and having (understandably) weaker warranties, that say their products are "designed to" the standards. . . whatever that means. Be assured that when SEL mentions a standard, we meet it! Not only "designed to." Not only "tested to." But "tested to and passed with margin!" Standards exist for a reason: these devices are put to work in hostile environments, and you and we need to sleep at night, knowing we have taken every step possible to reasonably assure performance in the substation environment for many years.

Be Sure Your Discrete I/O System Measures Up to SEL Safety, Reliability, and Economy

DESIGN	SEL	OTHERS	IMPORTANCE
Positive retention of connectors	ā	no	Control wiring is stiff and heavy. Connectors without positive retention can come off, causing failure or misoperation of your control system.
2000 V all circuits to ground	ā	??	Faults can stress power supply and I/O to high voltages. Flash-over can destroy I/O and cause misoperations.
2000 V circuit-to-circuit	ā	??	Adjacent circuits can have different references.
HiPot routine test	ā	??	Every SEL device is HiPot tested in manufacturing before it goes out the door. Others may not be and may fail during HiPot testing of your panels.
Utility-rated power supply	ā	no	SEL makes its own power supplies, which have a 600-year MTBF. Others may use commercial supplies, as found in computers.
AC/DC inputs	ā	no	SEL inputs are dual-rated. Others are typically dc only. AC-rated inputs are needed for monitoring ac loads and voltage transformers.
Level-sensitive inputs	ā	no	SEL input thresholds are near one-half the battery voltage to prevent false assertions. Others may use "universal" inputs, with thresholds as low as 12 V, which may misoperate on battery grounds, transients, and switching events.
-40° to +85°C	ā	no	The SEL DPAC will work in outdoor cabinets and when air conditioning fails. Others probably won't.
Vibration	ā	??	Designed and tested to work in vibration-prone environments.
Tested to IEEE C37.90	ā	??	SEL type tests all products. Others may say only "designed to..." Type tests prove secure, reliable performance.

PROTOCOLS			
DNP3 and Modbus	ā	no	SEL recognizes that different applications require one or the other, so we provide both at no additional cost.
IEC 61850	ā	no	SEL supports the international standard for communications and integration in substations.
SEL Fast Message	ā	no	Enables easy additions to SEL communications processors.
SEL MIRRORING BITS communications	ā	no	Provides high-speed, secure, point-to-point communication.
SEL Messenger Points	ā	no	Receive station alarms and event notification by telephone with the SEL-3010 Event Messenger.

COMMUNICATIONS	SEL	OTHERS	IMPORTANCE
SERIAL			
EIA-232	ā	no	MOV protection, 5 Vdc pass-through for transceivers, and demodulated IRIG-B pass-through.
EIA-485	ā	??	MOV protection.
Fiber V-pin connector	ā	??	Improves communications reliability and far less susceptible to noise.
Fiber ST connector	ā	??	Improves communications reliability and far less susceptible to noise.
ETHERNET			
Dual 10/100BASE-T with integrated switch	ā	no	Integrated switch allows easy daisy-chaining of IP-based devices.
Dual 100BASE-FX Ethernet with integrated switch	ā	no	Improves communications reliability and far less susceptible to noise.
DEMODULATED IRIG-B			
IRIG-B input and output	ā	no	IRIG-B input and output connectors allow easy daisy-chaining of devices.
Microsecond accurate timing	ā	no	Time-critical events, such as breaker mechanism operations.

PROCESSING CAPABILITIES			
Math and logic	ā	no	Provides local control and processing.
Scheduling and timing of outputs	ā	no	Enable scheduling of outputs based on month, day, hour, and minute variables.
Logic processing interval to less than 2 ms	ā	no	Fast deterministic processing interval.
Command line response processing	ā	no	All programming and control can be accomplished from a command line.


SECURITY			
Strong passwords	ā	no	Supports alpha, numeric, and special characters up to 12 characters in length.
Port enable/disable	ā	no	Set security levels on a per port basis, and turn off unused ports.

WARRANTY AND SUPPORT			
No-hassle, ten-year, worldwide warranty	ā	no	Best in the industry.
Free worldwide technical support	ā	no	SEL maintains more than 80 offices in over 15 countries.



SCHWEITZER
ENGINEERING
LABORATORIES
PULLMAN, WASHINGTON USA

Industry-leading, worldwide,
ten-year warranty.



Powerful 32-bit microcontroller
delivers relay-speed I/O, logic,
and communications.

LEDs also show port address and
IRIG time code after lamp test.



Management
and setup port.



Lamp test, port address
check, and time-code check.

ENABLED
ALARM
MODE

Diagnostic LEDs.

1A 1B 2 3 LNK TX RX
IOIOI

Continuous display of
network activity with
communications port
activity LEDs.

I/O labels match status LEDs.

All outputs are rated for utility
grade per IEEE C37.90, eliminating
the need for interposing relays.

48 status LEDs,
one for every
I/O point.

Digital outputs.

OUT101 OUT102 OUT103 OUT104 OUT105 OUT106 OUT107 OUT108 OUT109 OUT110 OUT111 OUT112 OUT113 OUT114 OUT115 OUT116

A01 A02 A03 A04 A05 A06 A07 A08 A09 A10 A11 A12

A13

A14

A15

A16

A17

A18

A19

A20

A21

A22

A23

A24

A25

A26

A27

A28

A29

A30

A31

A32

A33

A34

A35

A36

IN301 IN302 IN303 IN304

IN305 IN306 IN307 IN308

IN309 IN310 IN311 IN312

IN313 IN314 IN315 IN316

C01

C02

C03

C04

C05

C06

C07

C08

C09

C10

C11

C12

C13

C14

C15

C16

C17

C18

C19

C20

C21

C22

C23

C24

C25

C26

C27

C28

C29

C30

C31

C32

All connectors have positive
retention, so wires and cables
cannot pull off.

Supports DNP3, MIRRORRED BITS communications, SEL Fast Messages, Modbus, and IEC 61850 protocols.

Industry standard 2U height.

Remove two screws to access configuration switches.



DPAC SEL-2440 DISCRETE PROGRAMMABLE AUTOMATION CONTROLLER


For simple I/O applications, the SEL-2440 can be configured with switch settings—no computer or software required.



SEL rugged power supply has an MTBF of 600 years.




Widest operating temperature range (−40° to +85°C), use indoors and in outdoor cabinets.



All digital inputs are rated for ac and dc and time-stamped to 1 μ s accuracy.

All input thresholds are near ½ nominal voltage to avoid false assertions during faults and battery grounds.

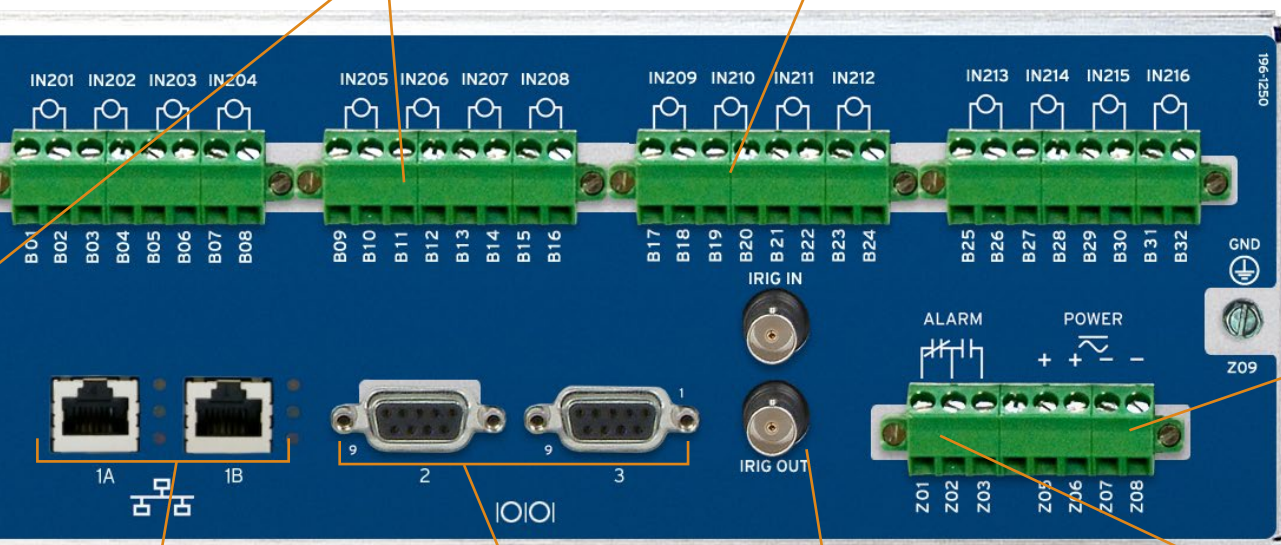



Standard 10/100BASE-T Ethernet ports with integrated switch eliminate the need for an external switch.

Two standard EIA-232 serial ports, with EIA-485 and fiber options available for one serial port.

Demodulated IRIG-B input synchronizes the microsecond timer to absolute time and drives the demodulated IRIG-B output.


Wide-range universal power source, 19.2–275 Vdc, and 19.2–264 Vac.

Alarm contact alerts you to self-test failure, communications access, and settings changes.

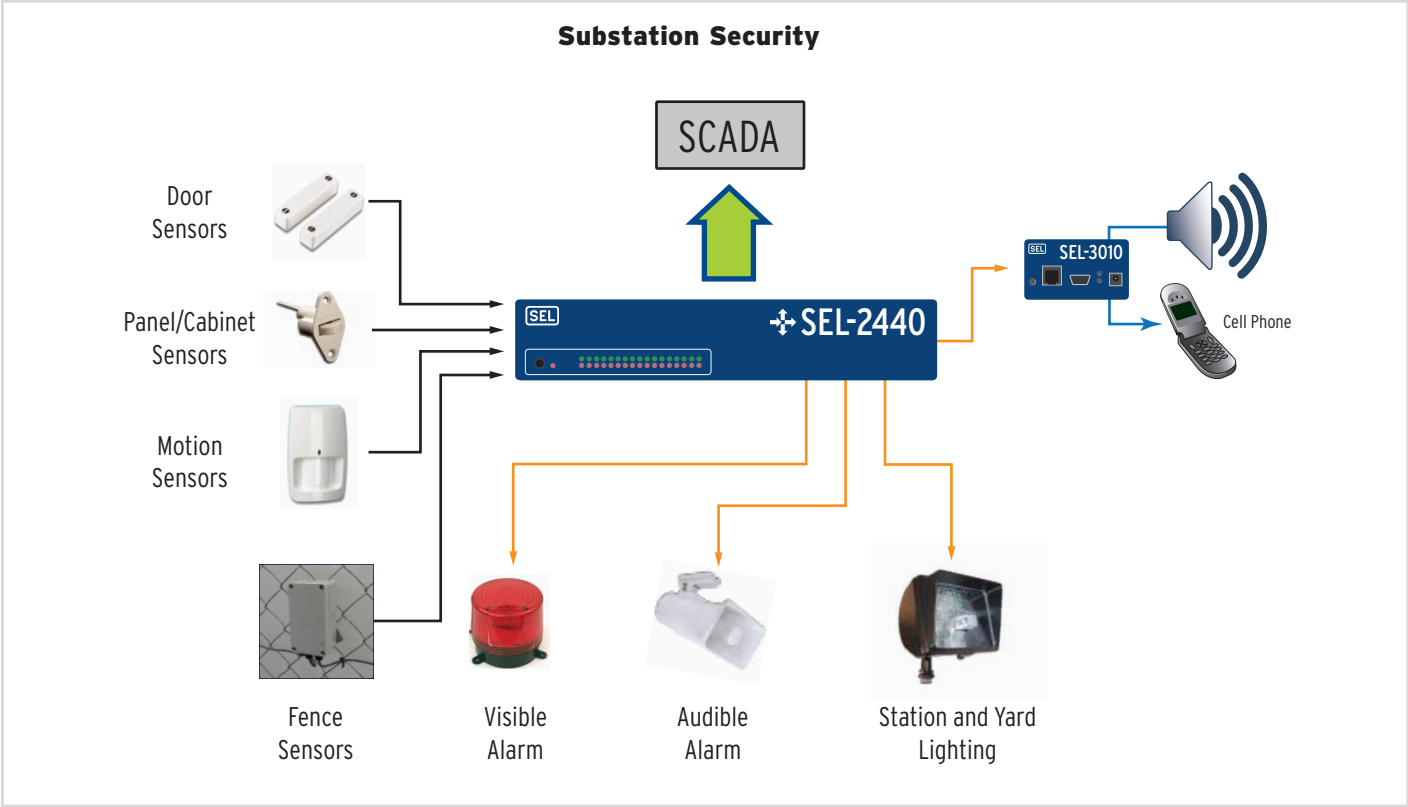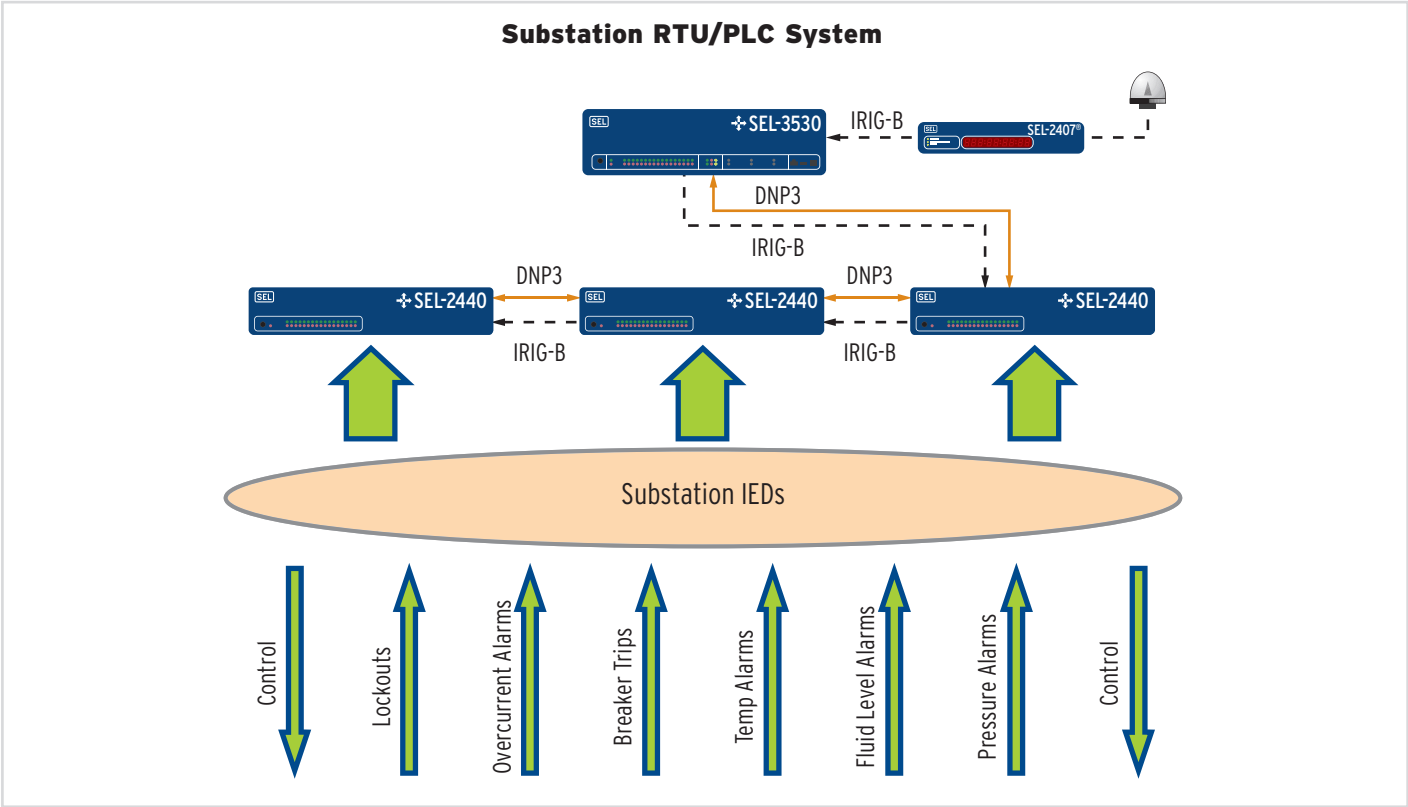


Applications


Add Discrete I/O to Legacy Systems

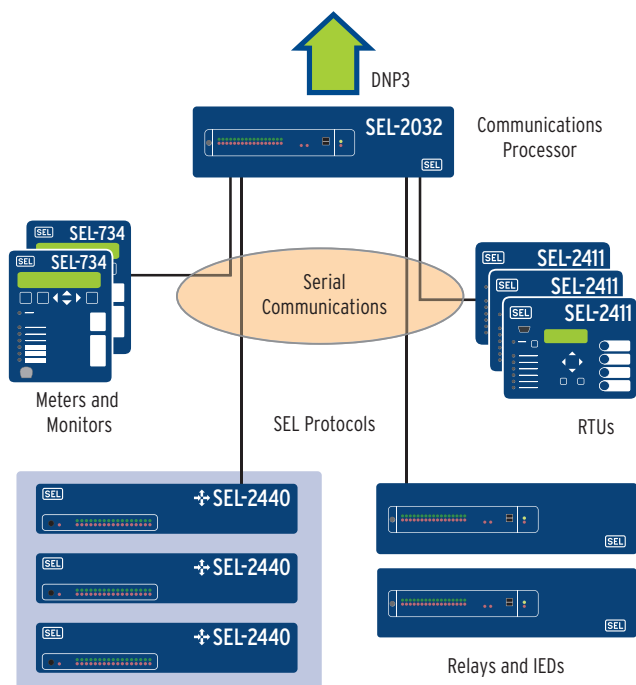


Build High-Density Discrete I/O

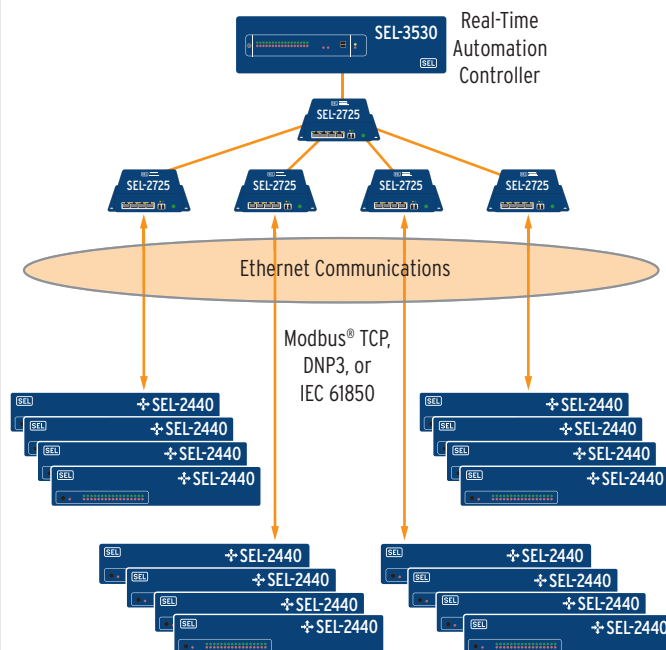


Transformer Protection

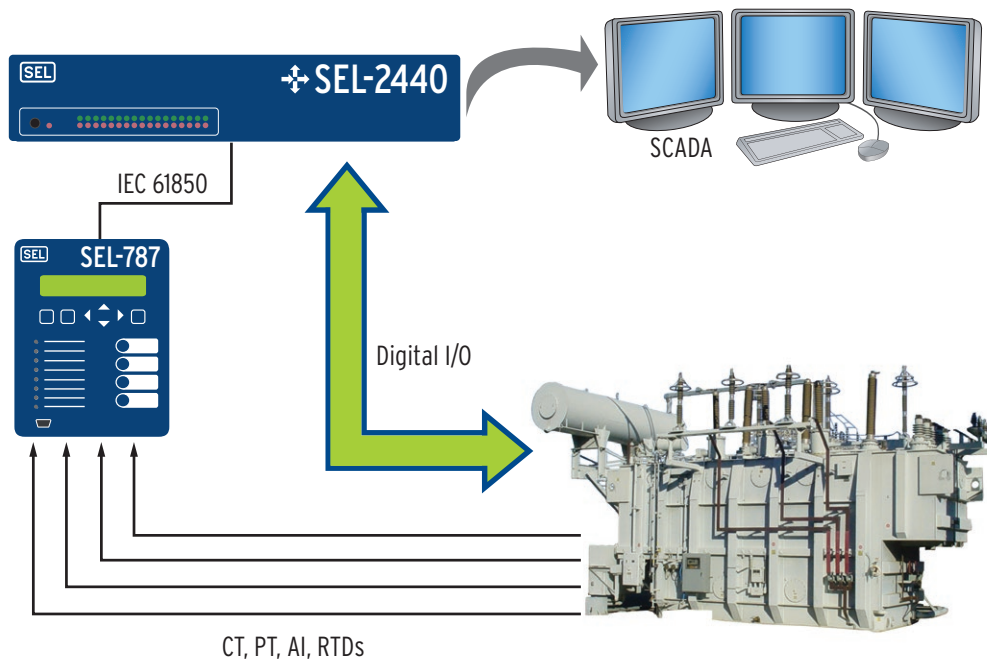



Bay Controller

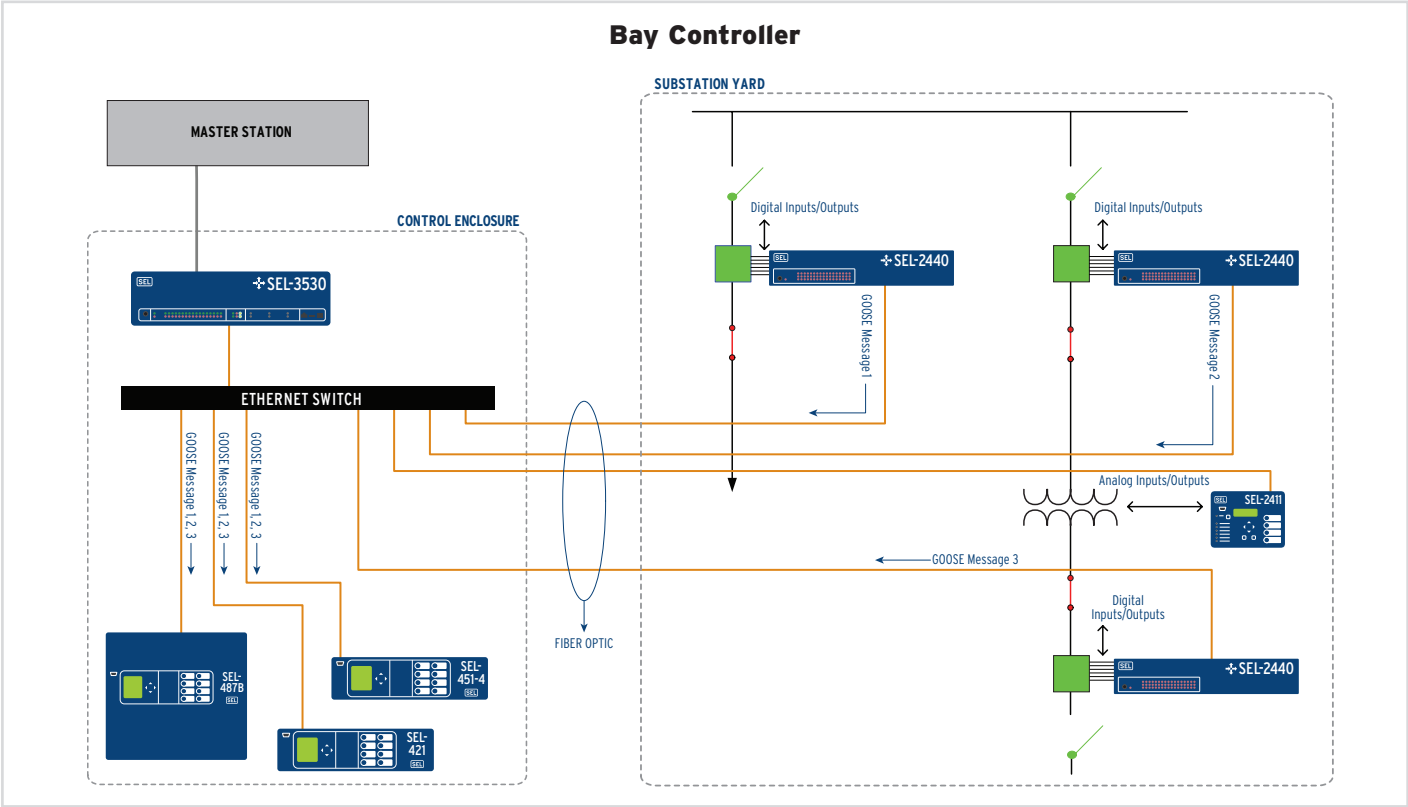

High-Density Substation I/O

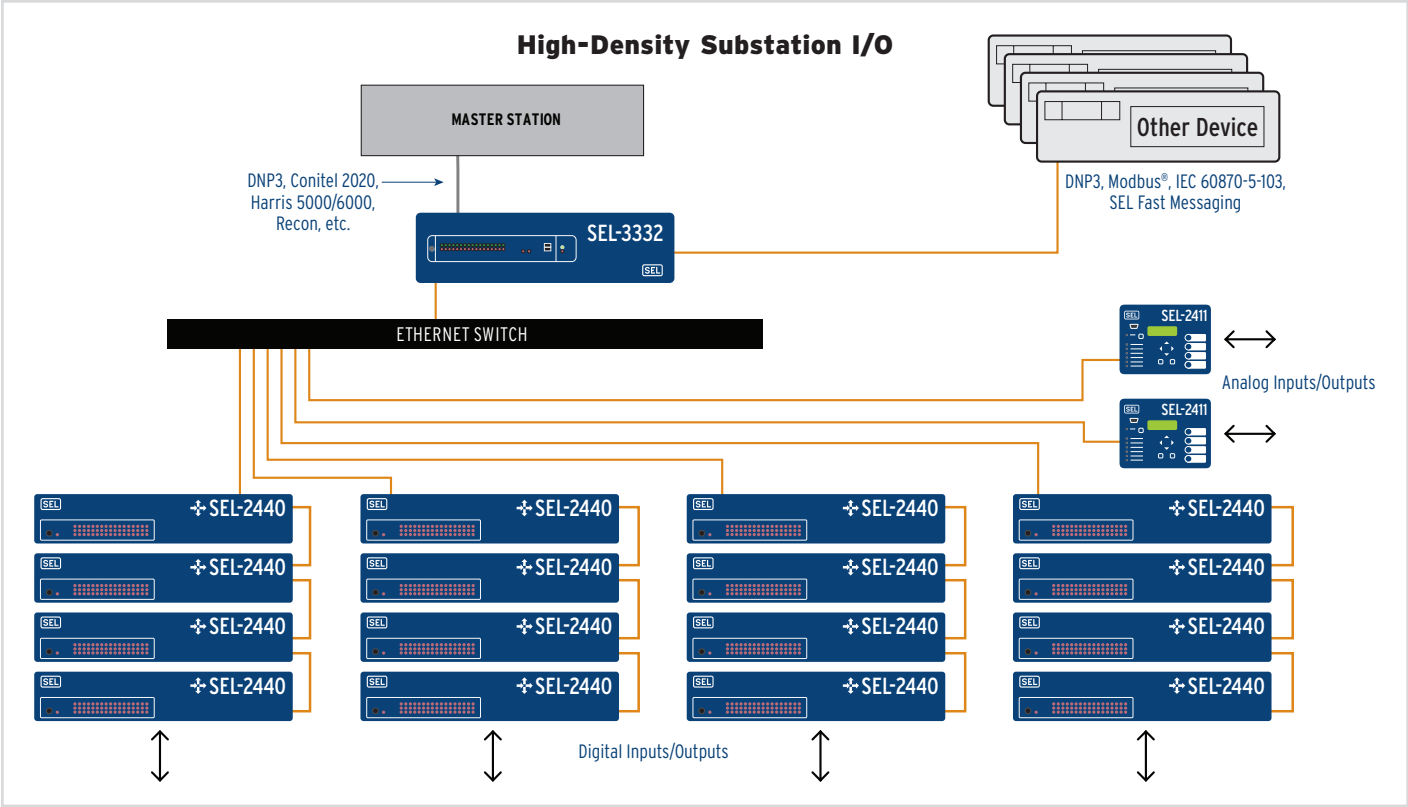

Applications

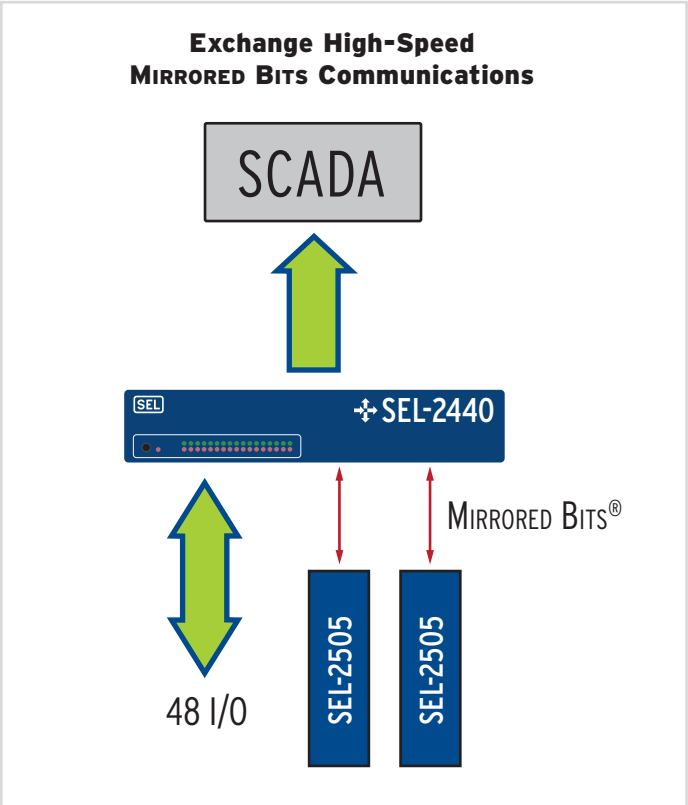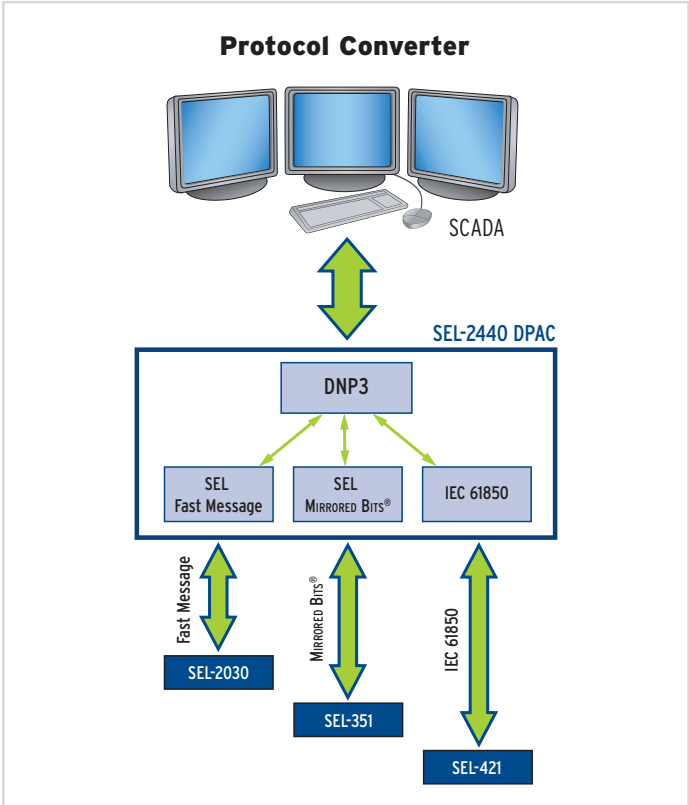

SEL-2440 DPAC Discrete Programmable Automation Controller

General Specifications

Standard Features

- 32 digital ac and dc inputs
- 16 digital outputs (12 Form A and 4 Form C)
- Dual copper 10/100BASE-T Ethernet port with integrated switch
- Dual EIA-232 serial ports (Port 2 and Port 3)
- Demodulated IRIG-B input and output
- Front USB configuration port
- Form C alarm output contact
- LEDs for communications status and port activity

Standard Protocols

- SEL protocols
- SEL MIRRORING BITS communications
- SEL ASCII and Fast Message
- SEL Messenger Points
- Modbus serial and Modbus TCP/IP
- DNP3 and DNP LAN/WAN

I/O Configurations

	Inputs	Outputs
Standard Configuration	32	16
Option 1	16	32
Option 2	48	0

Digital Input Ratings

- Optoisolated
- MOV protection
- Level sensitive inputs
- 300 V input maximum

Digital Output Ratings

- Pickup time <5 ms
- 6 A continuous carry
- 30 A make per IEEE C37.90
- MOV protection

Universal Power Supply

Ratings	120/230 Vac	24/48/125/250 Vdc
Range		19.2–275 Vdc
		19.2–264 Vac

Optional Features

- Dual 100BASE-FX fiber Ethernet
- Serial module communications (Port 2) options
 - EIA-485
 - Fiber-optic, 200 µm V-pin connector
 - Fiber-optic, 62.5 multimode ST connector
- IEC 61850 communications
- Conformal coating

Programmable Automation and Logic

- 32 logic variables
- 32 math variables
- 32 timers
- 32 counters
- 32 remote control points
- 128 remote analog points
- 32 latching points

Standards

- IEEE C37.90-1989
- IEC 60255 and 6100
- IEEE 1613-2003

Dimensions

2U rack-mount	88.1 mm H x 482.6 mm W x 158.1 mm D (3.47 x 19.00 x 6.23 in)
2U panel-mount	124.5 mm H x 502.9 mm W x 158.1 mm D (4.90 x 19.80 x 6.23 in)
DIN rail-mount	171.1 mm H x 447.0 mm W x 89.4 mm D (6.74 x 17.60 x 3.52 in)
Surface-mount	171.1 mm H x 482.6 mm W x 89.4 mm D (6.74 x 19.00 x 3.52 in)



Heat (+85°C)



Cold (–40°C)



Electrostatic Shock (15 kV)



Vibration (15 g Shock)



Pullman, Washington USA
Tel: +1.509.332.1890 • Fax: +1.509.332.7990 • selinc.com • info@selinc.com

© 2026 by Schweitzer Engineering Laboratories, Inc. PF00188 • 20260811

