SEL-3061

Cellular Router



Confidently apply secure cellular wireless communications to critical infrastructure applications

- Cellular wireless connectivity provides access to remote equipment and installations.
- Comprehensive security methods ensure the confidentiality and integrity of data.
- A web interface simplifies configuration and provides device management and diagnostic information.
- Multicarrier support enables fast deployment across the United States, including AT&T, FirstNet, Verizon, T-Mobile, and other roaming partners.
- Design and testing to protective relay standards ensures electromagnetic compatibility and surge immunity.



Strengthen Your Communications Systems

Wireless Connectivity to Remote Devices Using Cellular Networks

Provide wireless connectivity for a variety of critical infrastructure applications. The SEL-3061 Cellular Router provides remote access for devices using public and private cellular networks, including FirstNet. It supports 4G LTE cellular technologies as available by the cellular carrier.

Secure Communication Over Public and Private Cellular Networks

Ensure the confidentiality and integrity of your data using comprehensive security methods that include Internet Protocol Security (IPsec) data encryption, Transport Layer Security (TLS), secure virtual private network (VPN) connections, a stateful packet inspection (SPI) firewall, MAC address filtering, and syslog. Remote Authentication Dial-In

User Service (RADIUS) support allows you to manage user access using centralized authentication.


Network Monitoring

Simplify device management with an easy-to-use web interface that supports settings changes and over-the-air firmware upgrades. The SEL-3061 is equipped with the Simple Network Management Protocol (SNMP) for network monitoring of installed devices.

Application Overview

You can use the SEL-3061 for a variety of critical infrastructure applications. For electric utilities, the router provides connectivity to devices like

recloser controls, motor-operated switches, capacitor banks, voltage regulators, substations, and much more. The combination of serial and Ethernet ports provides application flexibility, and using public networks with secure tunneling makes installation easy without sacrificing security.

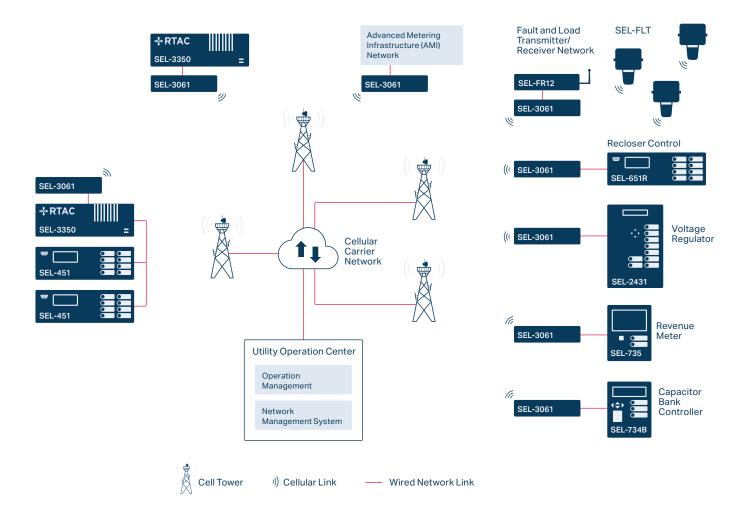

Applications

Communications to Substations


Use the SEL-3061 to communicate with substation equipment over secure cellular networks. The SEL-3061 is certified to operate across a broad range of cellular network operators. With LTE technology, which has as much as 150 Mbps downlink and 50 Mbps uplink, the SEL-3061 can be the primary communications link or it can be a redundant link to a fiber cable.



Backhaul for SEL Fault and Load Transmitter and Receiver Systems

Use the SEL-3061 to communicate with fault indicators and transmitters, including SEL-FLT Fault and Load Transmitters. The SEL-FLR Fault and Load Receiver collects fault and load data from SEL-FLT Transmitters, and then the SEL-3061 backhauls that information to a centralized location.








Controller

Distribution Network Automation

Provide communications for distribution automation with the SEL-3061. You can implement costeffective radio links for collecting SCADA, metering, and synchrophasor data from field devices and for engineering access to devices.



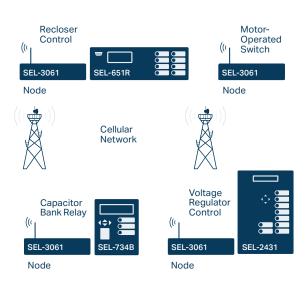


Industrial Oil and Gas Systems

Provide real-time data collection for analysis and alarm detection. Radios create communications links to tanks, wellheads, Lease Automatic Custody Transfer (LACT) units, flow lines, pumps, valves, and test stations for improved safety and cost savings through efficiency gains.









SEL-3061 Specifications

| General | |
|--------------------------------|---|
| Operating Temperature Range | -40° to +75°C (-40° to +167°F) |
| Relative Humidity Range | 15-93%, noncondensing |
| Antenna Connector Type | SMA |
| Ports | 1 Ethernet, 1 serial |
| Dimensions | 5.96" × 4.08" × 1.73" (151 mm × 104 mm × 44 mm) |
| Communications | 4G LTE with AT&T, FirstNet, Verizon, T-Mobile, and other roaming partners |
| Bands | 4G LTE: B2, B4, B5, B12, B13, B14, B66, B71 3G fallback (AT&T and T-Mobile only): B2, B4, B5 |
| Power | 12-30 Vdc, <5 W |
| Security | IPsec data encryption Secure VPN connections (5 concurrent VPN tunnels) SPI firewall User-set Destination Network Address Translation (DNAT), Source Network Address Translation (SNAT), and filter rules for accepting, rejecting, dropping, and logging packets Transport Layer Security (TLS) for Serial-IP connections MAC address filtering Syslog |
| Management | SNMP-based network monitoring HTTPS web interface Over-the-air settings changes and firmware upgrades Centralized user management using RADIUS |
| Warranty | 10 years |

SEL SCHWEITZER ENGINEERING LABORATORIES

Making Electric Power Safer, More Reliable, and More Economical +1.509.332.1890 | info@selinc.com | selinc.com

