



SEL-2245-2 Analog Input Module

The SEL-2245-2 provides dc analog inputs for the SEL Axion®. Within an Axion system, install as many as sixteen SEL-2245-2 modules in any combination you want.

Front Panel

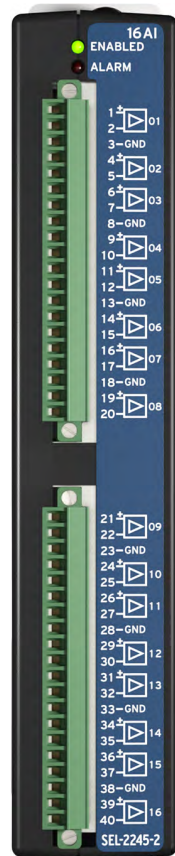


Figure 1 SEL-2245-2 DC Analog Input Module

Mechanical Installation

Each SEL-2242 chassis/backplane has four or ten slots, labeled A–J. Slots B–J support the SEL-2245-2 modules.

To install an SEL-2245-2 module, tip the top of the module away from the chassis, align the notch on the bottom of the module with the slot you want on the chassis, and place the module on the bottom lip of the chassis as *Figure 2* illustrates. The module is aligned properly when it rests entirely on the lip of the chassis.



Figure 2 Proper Module Placement

Next, carefully rotate the module into the chassis, making sure that the alignment tab fits into the corresponding slot at the top of the chassis (refer to *Figure 3*). Finally, press the module firmly into the chassis and tighten the chassis retaining screw.



Figure 3 Final Module Alignment

Input Connections

The SEL-2245-2 dc analog inputs include a plus sign to indicate the positive convention. Refer to *Specifications* for analog input ratings and to *Figure 1* for terminal assignments. You can configure inputs to measure ± 20 mA, ± 2 mA, or ± 10 V signals. Configure inputs by adding a Fieldbus I/O connection for each module in ACSELERATOR RTAC[®] SEL-5033 Software. See the EtherCAT[®] portion in *Section 2: Communications* in the SEL-5033 software manual for details.

LED Indicators

The LEDs labeled **ENABLED** and **ALARM** are related to EtherCAT network operation. The green **ENABLED** LED illuminates when the module is operating normally on the network. The **ALARM** LED illuminates during network initialization or when there is a problem with the network. Refer to *Section 3: Testing and Troubleshooting* in the *SEL-2240 Instruction Manual* for more information.

Specifications

Compliance

Designed and manufactured under an ISO 9001 certified quality management system

UL Listed to U.S. and Canadian safety standards (File NRAQ, NRAQ7 per UL508, and C22.2 No. 14)

CE Mark

Product Standards

IEC 60255-26:2013 - Relays and Protection Equipment: EMC
 IEC 60255-27:2014 - Relays and Protection Equipment: Safety
 IEC 60825-2:2004 +A1:2007 +A2:2010 for fiber-optic communications
 IEC 61850-3:2013 - Comm Systems for Power Utility Automation

General

Operating and Storage Temperature Range

-40° to +85°C (-40° to +185°F)

Units should be stored and transported in their original packaging.

Note: Operating temperature evaluated for UL ambient 0° to 40°C.

Operating Environment

Pollution Degree:	2
Overvoltage Category:	II
Insulation Class:	1
Relative Humidity:	5–95%, noncondensing
Maximum Altitude:	2000 m
Vibration, Earth Tremors:	Class 1

DC Transducer (Analog) Inputs (SEL-2245-2)

Input Impedance

Current Mode: 200 Ω for ±20 mA
 5000 Ω for ±2 mA

Voltage Mode: 10 MΩ

Input Range (Maximum):

±20 mA
 (transducers: 4–20 mA or 0–20 mA typical)
 ±2 mA
 (transducers: 0–1 mA or 0–2 mA typical)
 ±10 V
 (transducers: 0–5 V or 0–10 V typical)

Sampling Rate: 1 ksps

Anti-Alias Filter

Corner Frequency: 330 Hz
 Rolloff: 20 dBV per decade

Digital Filter

Corner Frequency: Filter A: 16 Hz
 Filter B: 10 Hz
 Filter C: 0.2 Hz

50 Hz Rejection: Filter A: > 30 dB
 Filter B: > 50 dB
 Filter C: > 70 dB

60 Hz Rejection: Filter A: > 60 dB
 Filter B: > 70 dB
 Filter C: > 70 dB

Step Response

No Filter: 3 ms (10–90% response)
 Filter A: 23 ms (10–90% response)

Filter B: 35 ms (10–90% response)

Filter C: 700 ms (10–90% response)

Common Mode Range

±35 Vdc between inputs
 ±250 Vdc all inputs to chassis

Isolation

500 Vac between separate inputs
 2000 Vac all inputs to chassis

Accuracy at 25°C

ADC: 16 bit

Inputs: 0.25% of full-scale typical (voltage mode)
 0.05% with field calibration (voltage mode)
 0.5% of full-scale typical (current mode)
 0.1% with field calibration (current mode)

Accuracy Variation With Temperature

Inputs: ±0.015% per °C of full scale
 (±20 mA, ±2 mA, or ±10 V)

ADC: ±0.004% per °C

Triggered Waveform Recording

Sampling Rate: 1 kHz

Record Duration: 0.1 second increments from 0.5 s to 144 s

Record Pretrigger: 0.05 s minimum to a maximum of (record length minus 0.05) s

Waveform File Format: COMTRADE (IEEE C37.111-1999 compliant)

Type Tests

Environmental Tests

Enclosure Protection: IEC 60529:2001 + CRGD:2003
 IP3X excluding the terminal blocks

Vibration Resistance: IEC 60255-21-1:1988
 Vibration Endurance, Severity: Class 2
 Vibration Response, Severity: Class 2

Shock Resistance: IEC 60255-21-2:1988
 Bump Withstand, Severity: Class 1
 Shock Withstand, Severity: Class 1
 Shock Response, Severity: Class 2

Seismic: IEC 60255-21-3:1993
 Quake Response, Severity: Class 2

Cold, Operational and Cold, Storage: IEC 60068-2-1:2007
 -40°C, 16 hours

Dry Heat, Operational and Dry Heat, Storage: IEC 60068-2-2:2007
 +85°C, 16 hours

Damp Heat, Cyclic: IEC 60068-2-30:2005
 25° to 55°C, 6 cycles, 95% relative humidity

Damp Heat, Steady State: IEC 60068-2-78:2012
 93% RH and 55°C for 10 days

Change of Temperature: IEC 60068-2-14:2009
 1 deg. per minute, -40° and +85°C,
 5 cycles

Dielectric Strength and Impulse Tests

Impulse:	IIEC 60255-5:2000 IEEE C37.90-2005 Severity Level: 0.5 Joule, 2 kV channel to chassis 0.5 Joule, 500 V channel to channel
Dielectric (HiPot):	IEC 60255-5:2000 IEEE C37.90-2005 Severity Level: 2000 Vac channel to chassis for 1 minute 500 Vac channel to channel for 1 minute

RFI and Interference Tests**EMC Immunity**

Low-level analog dc signals were tested with shielded twisted pair for optimum noise rejection.

Slow Damped Oscillatory Waves: IEC 61000-4-18:2006 + A1:2010
Severity Level: 2.5 kV common mode
1 kV differential mode

Electrostatic Discharge Immunity: IEEE C37.90.3-2001
IEC 60255-22-2:2008
IEC 61000-4-2:2008
Severity Level: 8 kV contact discharge
15 kV air discharge
(Filter A applied)

Radiated RF Immunity: IEEE C37.90.2-2004
Severity Level: 35 V/m
IEC 61000-4-3:2008
IEC 60255-22-3:2007
Severity Level: 10 V/m

Digital Radio Telephone RF Immunity: ENV 50204:1995
Severity Level:
10 V/m at 900 MHz and 1.89 GHz

Conducted RF Immunity: IEC 60255-22-6:2001
IEC 61000-4-6:2008
Severity Level: 10 Vrms

Surge Immunity: IEC 60255-22-5:2008
IEC 61000-4-5:2005
Severity Level: 1 kV Line to Line,
2 kV Line to Earth
(8 ms filter voltage mode,
6 ms filter high-current mode,
4 ms filter low-current mode)

Fast Transient, Burst Immunity: IEC 60255-22-4:2008
IEC 61000-4-4:2011
Severity Level: Class A: 4 kV, 5 kHz;
2 kV, 5 kHz on communications ports

Magnetic Field Immunity: IEC 61000-4-8:2009
Severity Level: 1000 A/m for 3 seconds,
100 A/m for 1 minute
IEC 61000-4-9:2001
Severity Level: 1000 A/m
IEC 61000-4-10:2001
Severity Level: 100 A/m

Surge Withstand Capability Immunity:	IEEE C37.90.1-2002 Severity Level: 2.5 kV Oscillatory 4.0 kV Fast Transient (Filter A applied)
Oscillatory Waves Immunity:	IEC 61000-4-12:2006 Severity Level: Ring Wave: 2 kV common, 1.0 kV differential Oscillatory: 2.5 kV common, 1.0 kV differential (Filter A applied)
Common Mode Disturbance Immunity:	IEC 61000-4-16:2002 Frequency: 0 to 150 Hz Severity Level: Level 4, Segment 4: 30 Vrms open-circuit, 15 to 150 kHz

Emissions

Radiated and Conducted Emissions:	IEC 60255-25:2000 Severity Level: Class A Canada ICES-001 (A) / NMB-001 (A)
-----------------------------------	---

© 2013-2022 by Schweitzer Engineering Laboratories, Inc. All rights reserved.

All brand or product names appearing in this document are the trademark or registered trademark of their respective holders. No SEL trademarks may be used without written permission. SEL products appearing in this document may be covered by U.S. and Foreign patents.

Schweitzer Engineering Laboratories, Inc. reserves all rights and benefits afforded under federal and international copyright and patent laws in its products, including without limitation software, firmware, and documentation.

The information in this document is provided for informational use only and is subject to change without notice. Schweitzer Engineering Laboratories, Inc. has approved only the English language document.

This product is covered by the standard SEL 10-year warranty. For warranty details, visit selinc.com or contact your customer service representative.

SCHWEITZER ENGINEERING LABORATORIES, INC.

2350 NE Hopkins Court • Pullman, WA 99163-5603 U.S.A.

Tel: +1.509.332.1890 • Fax: +1.509.332.7990

selinc.com • info@selinc.com

