

SEL-C478N EIA-232 Serial Adapter Cable with IRIG-B

Cable for connecting an SEL-3390S8 Serial Card of the SEL-3355 Computer to an EIA-232 serial cable or an SEL Fiber-Optic transceiver with a 9-Pin male connector.⁽¹⁾ Includes a BNC female connection to bring in IRIG-B by connecting an SEL-C953 or like cable.


Part Number:

C 4 7 8 N -

Length

Specify in Feet Max length 6 Feet

⁽¹⁾ To verify your cable application, use the Cable Selector at <https://www.selinc.com/CableSelector>

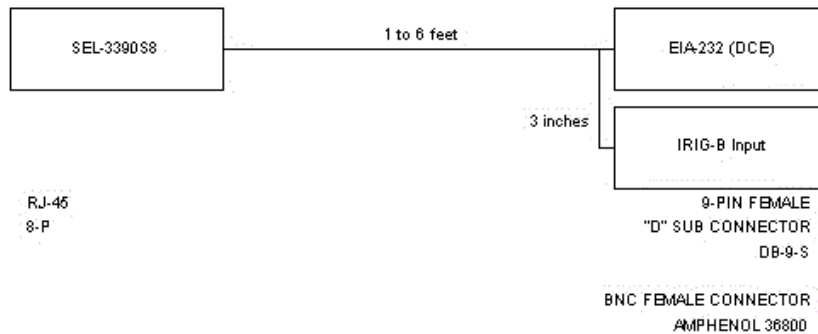

SEL-3390S8		EIA-232 (DCE)	
+5 VDC/DCD	2	GREEN/WHITE	1 +5 VDC/DCD
GND	4	BLUE	5 GND
RXD	5	BLUE/WHITE	2 RXD (OUT)
TXD	6	GREEN	3 TXD (IN)
CTS	7	BROWN/WHITE	8 CTS (OUT)
RTS	8	BROWN	7 RTS (IN)
SHELL		SHIELD	SHELL

IRIG-B Input	
GND	1 SHIELD
+IRIG-B	3 CENTER

Comments: Jack Screws are attached to 9-pin female connector.

SEL-3390S8 Serial Card pin 2 factory default configuration is DCD input.
+5Vdc output can be enabled via software settings.

Irige-B Input will accept a C953 Coaxial cable.

Making Electric Power Safer, More Reliable, and More Economical®

SEL SCHWEITZER ENGINEERING LABORATORIES, INC.

2350 NE Hopkins Court - Pullman, WA 99163 USA
Phone: +1.509.332.1890 - Fax: +1.509.332.7990