

# SEL-3560

## Compact Real-Time Automation Controller (RTAC)



### Compact, fast, and powerful RTACs for advanced data concentration and control

- Processes data up to 55 times faster than previous-generation RTACs, providing powerful computing for large-scale automation projects.
- Increases cybersecurity by using exe-GUARD® allowlist antivirus technology to allow only authorized applications to run.
- Provides 1 ms deterministic processing intervals for time-sensitive protection and automation control.
- Eliminates the need for a PC in the substation with an integrated video port and easy-to-use HMI.





## Overview

### Powerful

Designed for the most advanced automation applications

- 2.0 GHz Intel Xeon quad-core processor
- Quad-core processing to complement the multithread IEC 61131 logic engine
- 8 GB of error-correcting code (ECC) RAM
- Three high-resolution display interfaces for local HMI support
- Two options available: SEL-3560S with a compact form factor or the SEL-3560E with two PCI/PCIe expansion slots

### Reliable

Manufactured to operate in the harshest environments

- No fans, spinning drives, or moving parts to wear out
- Designed to withstand operating temperatures of  $-40^{\circ}$  to  $+75^{\circ}\text{C}$  ( $-40^{\circ}$  to  $+167^{\circ}\text{F}$ )
- Reliable operation in the presence of vibration, seismic, and shock (15 g) events as well as large electromagnetic fields or radio frequency interference
- Ten-year, no-questions-asked warranty

### Secure

Designed for secure operation and access

- SEL allowlist antivirus exe-GUARD technology to protect against malware and other cybersecurity threats
- Individual and role-based accounts for configuration software and HMI operation
- Centralized authentication through the Lightweight Directory Access Protocol (LDAP)
- Alerts via Syslog, text/email, and Sequence of Events (SOE) logging
- Optional encryption for Ethernet-tunneled serial SCADA protocols and engineering access via Secure Shell (SSH) and Secure Sockets Layer (SSL)/Transport Layer Security (TLS) tunneling


### Deterministic

Built for time-sensitive control applications

- Two deterministic processing tasks with configurable cycle times
- Configurable task cycle times as fast as 1 ms
- Diagnostics to help you manage and optimize all resources efficiently



## Rugged Features



-40°C +75°C  
-40°F +167°F



No Moving Parts



SLC SSD Memory



ECC RAM



Conformal Coating



Shock/  
Vibration Resistance



ESD Resistance



# Applications

## Secure Data Concentration and Protocol Conversion

Deploy the SEL-3560 RTAC as a data concentrator using modern and legacy protocols, such as IEC 61850 MMS, Modbus, DNP3, IEC 61850 GOOSE messaging, LG 8979, IEC 60870-5-101/104, the Parallel Redundancy Protocol (PRP), the IEEE 1588 Precision Time Protocol Version 2 (PTPv2), or MIRRORING BITS® communications. Integrate serial (SEL-3560E only) and Ethernet Intelligent electronic devices (IEDs).

Enable logging on any system or IED data tag to view and archive substation-wide event records. You can monitor substation networking equipment using the Simple Network Management Protocol (SNMP) and can send event-based Syslog notifications to SCADA for complete substation awareness. The SEL-3560 is built with a focus on security to address NERC CIP requirements.


## Distribution Automation or Microgrid Controller

Deploy the SEL-3560 as an intelligent controller or a front-end processor for a microgrid system. Its deterministic and automated control is fast enough

to provide real-time balancing of generation and load. You can use the task scheduler to prioritize control, SCADA, and other tasks. Coupled with the secure, redundant, and self-healing network capabilities of the SEL ICON® Integrated Communications Optical Network and accurate time distribution to all IEDs, the SEL-3560 can control and monitor all aspects of a microgrid while also displaying data with the built-in HMI.


## Remote Engineering Access and SCADA Communications

Enclosure cabinets are a part of a power system's remote operations and communications, and the compact size of the SEL-3560 is ideal for these small spaces. You can also collect, measure, and organize data from both serial (SEL-3560E only) and Ethernet IEDs through several of the RTAC standard protocols, such as Modbus, DNP3, and MIRRORING BITS communications. The RTAC serial ports and high-speed network connection give you multiple ways to gain secure, remote access. You can add expanded SEL-2240 Axion® I/O for remote monitoring and control of power system processes, maximizing state awareness and improving overall system performance.

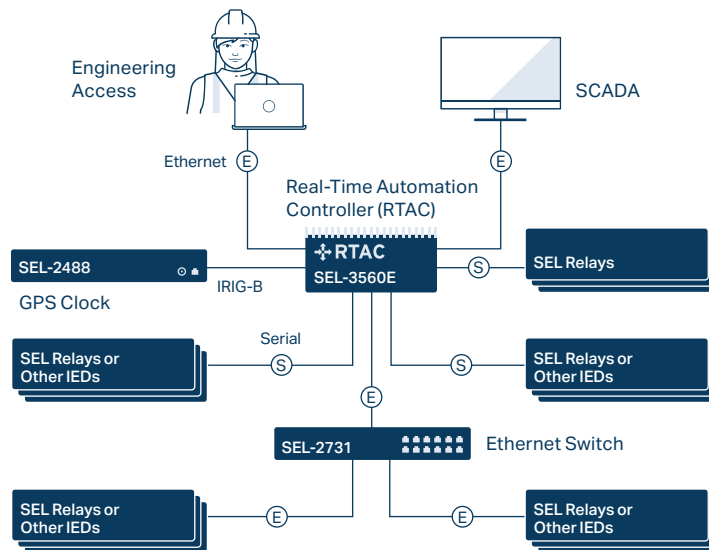

## Integrate Power Management With Industrial Control

The RTAC provides a powerful gateway between the substation and the factory using EtherNet/IP. This popular industrial protocol facilitates reliable communication between electronic devices in industrial automation systems. You can use the RTAC EtherNet/IP adapter to exchange critical data for real-time monitoring, process control, and power system integration.

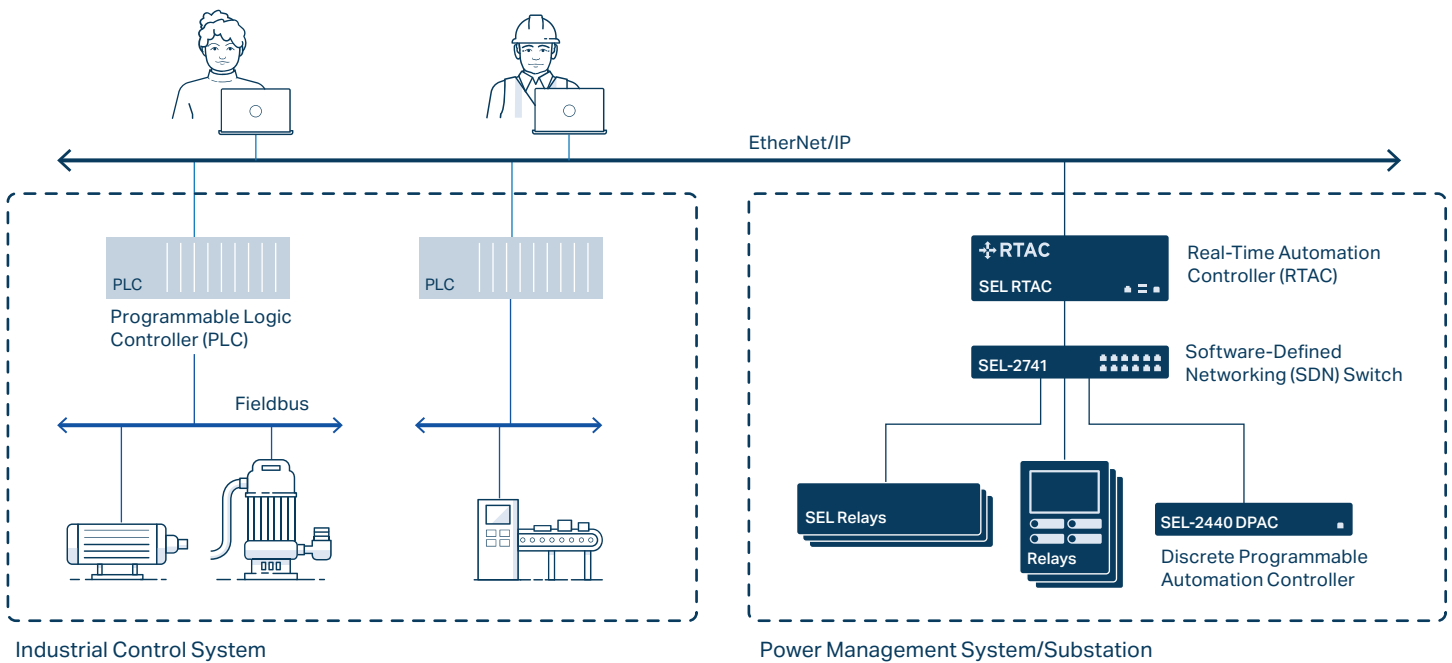

## Visualize Data and System Control With the Integrated HMI

The RTAC HMI, with HTML5 technology, provides an easy way to visualize data and create custom diagrams to monitor and control your system. The HMI provides authenticated access for multiple users and locations and is viewable from a remote web browser. The video output port on the SEL-3560 directly connects to a monitor, allowing you to quickly and locally view the HMI and SOE data without an additional computer.

### All-in-One Performance

Combine automation processing and HMI visualization into one device with the SEL-3560. This eliminates the need for an additional substation computer dedicated to running the HMI, which reduces points of failure in your substation.

### Live System Trend Values

Quickly visualize data values over a defined period of time. You can create custom trends when configuring your HMI or design trends on the fly in the HMI.


### Simplified Tag Integration

Use RTAC tags in your HMI configuration. By sharing tags from the advanced logic processing engine, you can streamline HMI creation and design.

### Easy-to-Use Diagram Configuration Tools


ACSELERATOR Diagram Builder™ SEL-5035 Software provides tools to simplify diagram creation. You can drag and drop controls onto the design palette, easily align and group diagram controls, and accelerate tag assignment with the search-and-replace functionality.

# SEL-3560S Overview

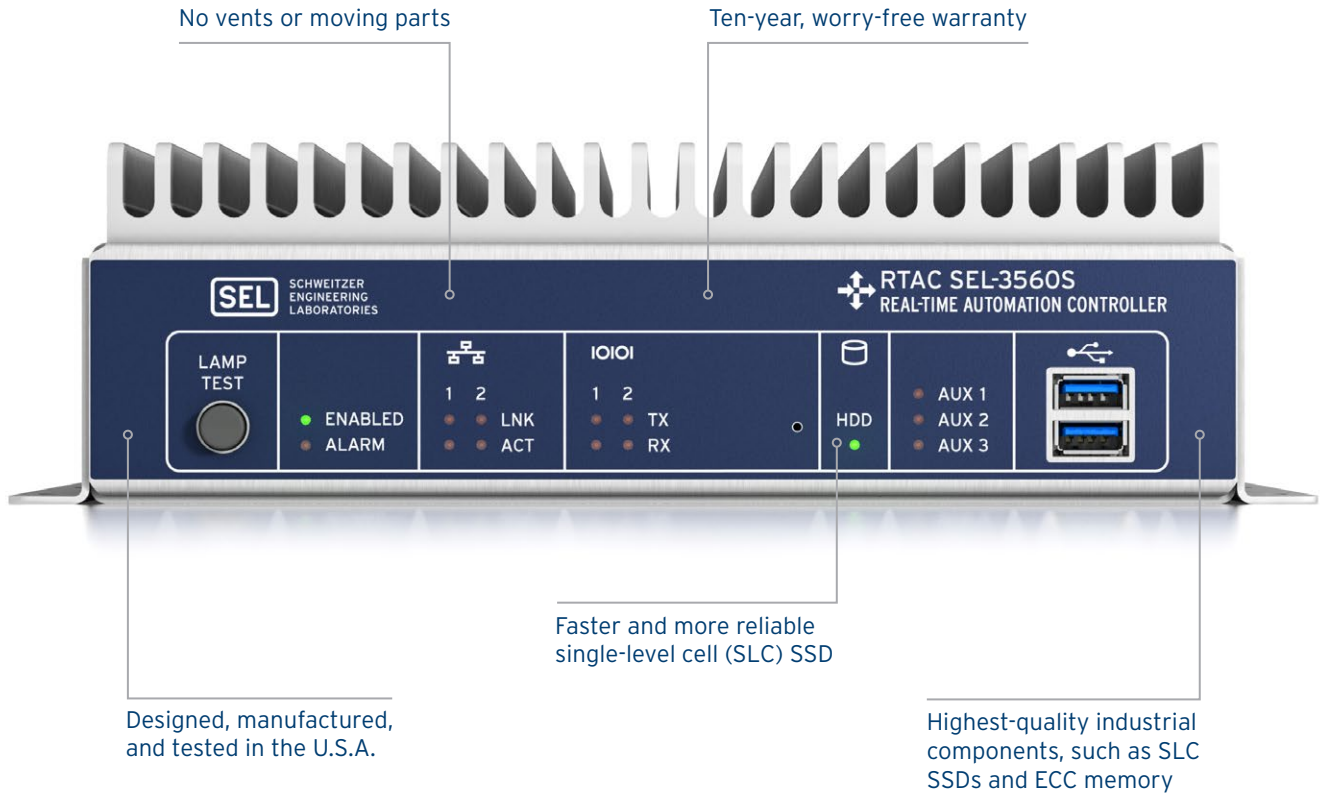


## Product Physical Dimensions

Standard Chassis

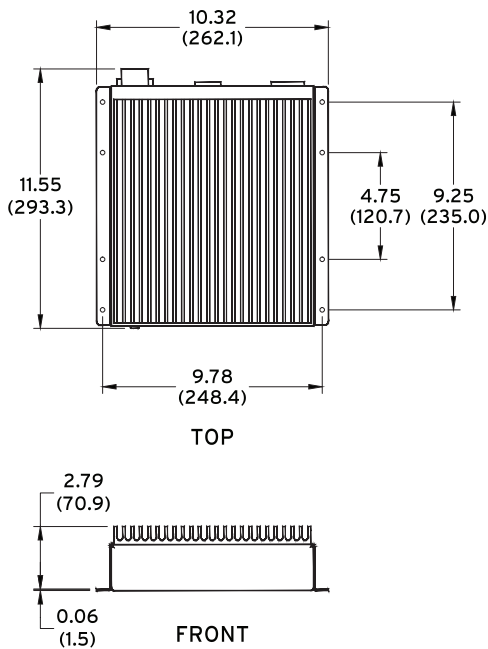


Conduction-Cooled Chassis

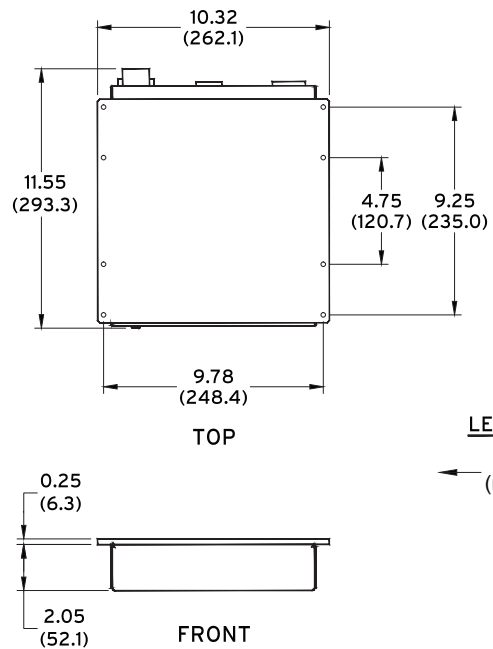

**LEGEND**


in  
(mm)

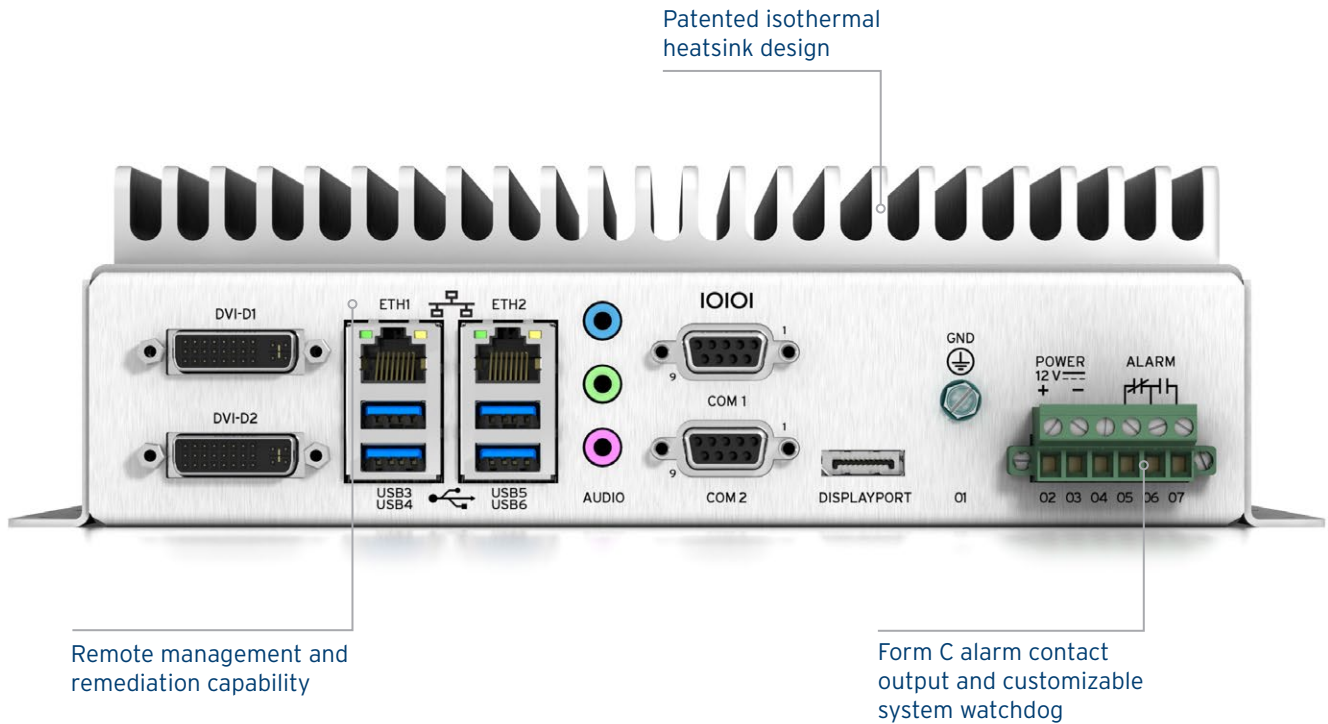

## Ports


<b>Video</b>	<p>Intel HD Graphics P530 Controller Independent display outputs: 3 DVI-D maximum resolution: 1920 × 1200 bpp DisplayPort 1.2 maximum resolution: 4096 × 2304 bpp</p>
<b>Audio</b>	<p>IDT 92HD91 HD Audio Codec 3 analog 3.5 mm TRS jacks: line input, line/headphone output, microphone input <b>Intel Display Audio</b> DVI-D and DisplayPort connectors; digital audio bitstream output</p>
<b>USB</b>	<p>4 rear-panel ports, 2 front-panel ports USB 3.1-compliant, 2,000 mA current each</p>
<b>Ethernet</b>	<p>ETH 1: Intel WGI219LM, 10/100/1000 Mbps ETH2: Intel WGI210IT, 10/100/1000 Mbps</p>
<b>Serial</b>	<p>2 EIA-232 ports, DB-9 connectors, 300 to 115,200 bps; 5 V port power, 500 mA available on Pin 1</p>

# SEL-3560E Overview

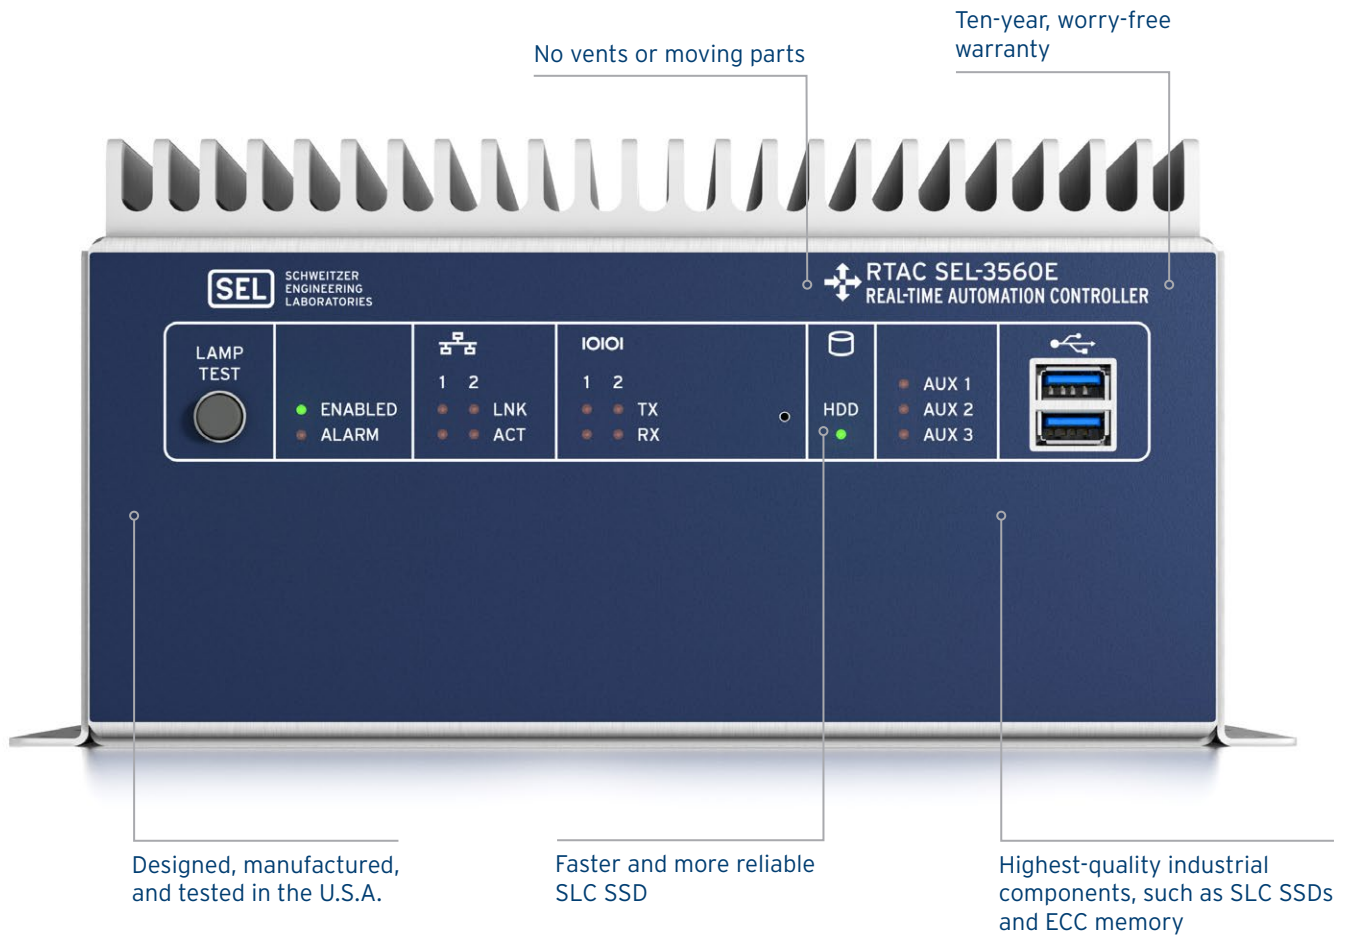


## Product Physical Dimensions

**Standard Chassis**

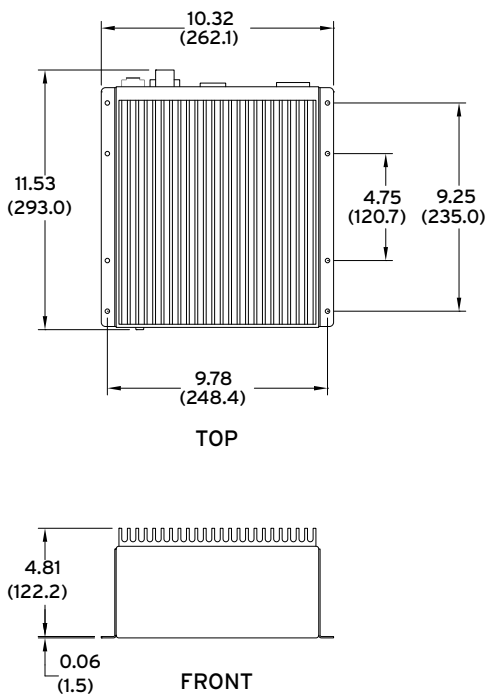


**Conduction-Cooled Chassis**

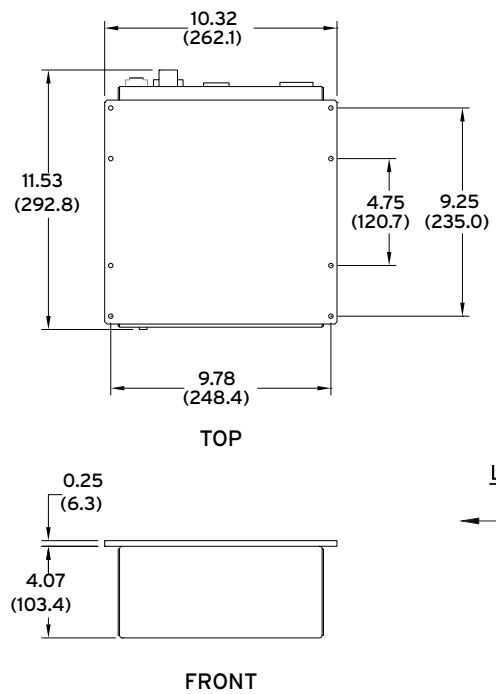

**LEGEND**

in  
(mm)



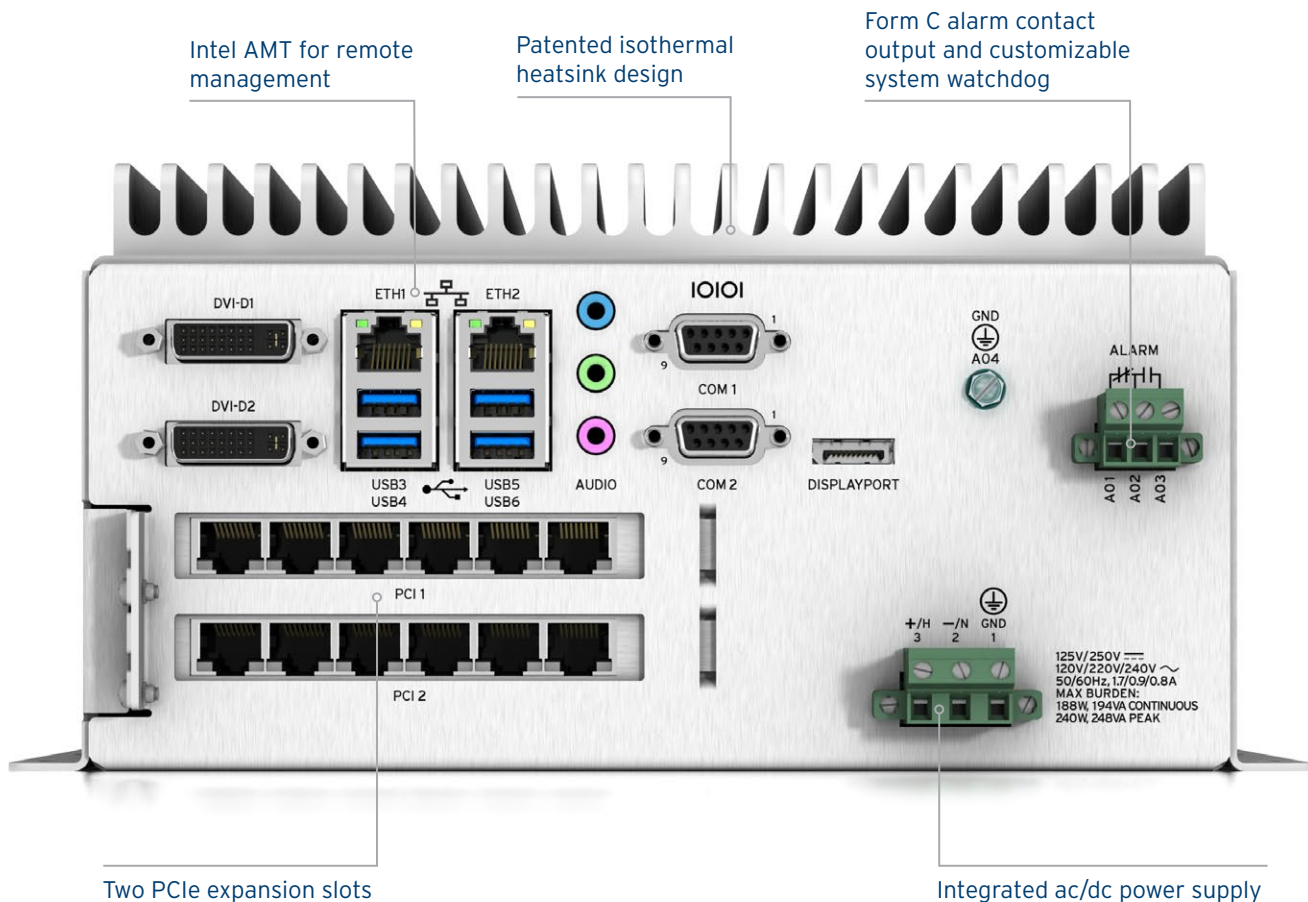

## Ports

<b>Video</b>	Intel HD Graphics P530 Controller Independent display outputs: 3 DVI-D maximum resolution: 1920 × 1200 bpp DisplayPort 1.2 maximum resolution: 4096 × 2304 bpp
<b>Audio</b>	IDT 92HD91 HD Audio Codec 3 analog 3.5 mm TRS jacks: line input, line/headphone output, microphone input Intel Display Audio DVI-D and DisplayPort connectors; digital audio bitstream output
<b>USB</b>	4 rear-panel ports, 2 front-panel ports USB 3.1-compliant, 2,000 mA current each
<b>Ethernet</b>	ETH 1: Intel WGI219LM, 10/100/1000 Mbps ETH2: Intel WGI210IT, 10/100/1000 Mbps SEL-3390E4 PCIe x4 Expansion Cards: As many as 8 additional 10/100/1000 Mbps ports, copper or LC fiber small form-factor pluggable (SFP)*
<b>Serial</b>	2 EIA-232 ports, DB-9 connectors, 300 to 115,200 bps; 5 V port power, 500 mA available on Pin 1 SEL-3390S8 PCIe x1 Expansion Cards: As many as 18 additional EIA-232/422/485 ports, RJ45 connectors, 300 to 921,600 bps*
<b>Expansion</b>	Two PCI/PCIe expansion slots, enabling you to customize the system I/O to meet your application needs. Choose from a selection of SEL PCI/PCIe cards, or install a third-party expansion card.

\*Optional feature

# SEL-3560 Specifications

General	SEL-3360S	SEL-3360E
<b>CPU</b>	Xeon E3-1505L Quad-Core Speed: 2.0 GHz base, 2.8 GHz turbo Cache: 1 MB L2, 8 MB L3	
<b>Storage</b>	30 to 7,680 GB	
<b>RAM</b>	8 GB DDR4 ECC PC4-17000 (2,133 MHz)	Expandable up to 16 GB
<b>HMI</b>	Viewable remotely or via the local display*	
<b>Time Code Input/Output</b>	Input with supplied SEL-3390S8 Expansion Card, RJ45 connector, demodulated IRIG-B TTL-compatible	
<b>Digital and Analog I/O</b>	1 DO	
<b>Ethernet Ports</b>	2 standard	2 standard (up to 8 additional with PCIe expansion)
<b>Serial Ports</b>	2 standard	8 standard (up to 6 additional with PCIe expansion)
<b>USB Ports</b>	6 USB 3.1	
<b>Power Supply</b>	125/250 Vdc or 120/240 Vac, or 48 Vdc; 50/60 Hz Dual power supplies*	Integrated 125/250 Vdc or 120/240 Vac high-voltage input, or 48 Vdc low-voltage input; 50/60 Hz
<b>Operating Temperature Range</b>	-40° to +75°C (-40° to +167°F)	-40° to +60°C (-40° to +140°F)
<b>Size/Mounting</b>	Surface or DIN-rail mount	
<b>Other Features</b>	Conformal coating	
<b>Weight</b>	4.1 kg (9 lb)	6.8 kg (15 lb)

\*Optional feature

## Protocols

### Client

CDC Type II

Courier

CP 2179

DNP3 Serial, DNP3 LAN/WAN

EtherNet/IP—Explicit Message Client\*

File Transfer Protocol (FTP)/Secure FTP (SFTP)\*

Flex Parse

IEC 60870-5-101/104

IEC 60870-5-103

IEC 61850 MMS and MMS Client File Services\*

IEEE C37.118 Synchrophasors

LG 8979

Modbus RTU, Modbus TCP

OPC UA\*

SEL Protocols

SES-92

SNMP

---

### Server

CDC Type II

DNP3 Serial, DNP3 LAN/WAN

EtherNet/IP—Implicit Message Adapter\*

FTP/SFTP

IEC 60870-5-101/104

IEC 61850 MMS and MMS Server File Services\*

IEEE C37.118 Synchrophasors

LG 8979

Modbus RTU, Modbus TCP

OPC UA\*

SEL Protocols

SES-92

SNMP Agent

---

### Peer-to-Peer

IEC 61850 GOOSE\*

Network Global Variable List (NGVL)

SEL MIRRORRED BITS Communications

---

### Field Bus Protocol

EtherCAT® to SEL Axion I/O Modules

\*Optional feature

EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

**SEL SCHWEITZER ENGINEERING LABORATORIES**

Making Electric Power Safer, More Reliable, and More Economical  
+1.509.332.1890 | info@selinc.com | selinc.com

© 2025 by Schweitzer Engineering Laboratories, Inc.  
PF00609 • 20250102

